GB100E-0006



Specifications and Recommendations:

Nominal Impedance	4Ω
Frequency Response (-3dB)	1.8kHz - 24kHz
Power Handling (RMS)*	100W
Power Handling (Peak)*	300W
Recommended Power (RMS)*	12W - 100W
Recommended High Pass Filter	2500Hz, 24dB/Oct
Fs	1500Hz

^{*}With Recommended High Pass Filter

Installation Steps and Precautions:


Removal of OE tweeter:


 Gently press the tabs away from the speaker until the speaker can be removed from the housing.

Installation of Audiofrog OE tweeter:

• Press the Audiofrog tweeter into the housing.

Dimensions:

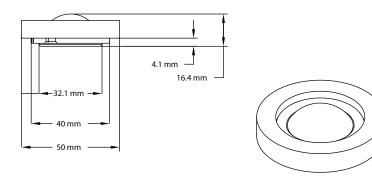

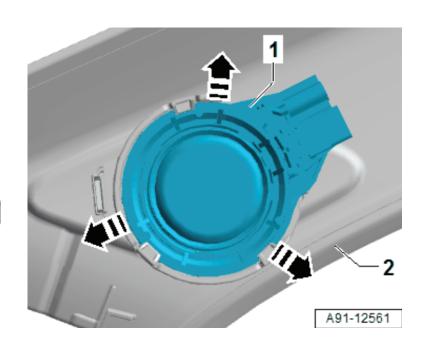

Fitment Information:

Verified Fit:

A Pillar location in 2016 and up Audi A4 cars.

Unverified but May Fit:

 Other Audi models with tweeters at the base of the A Pillar.

Please check your car's tweeter location and housing dimensions to confirm that the GB100E-0006 will fit.

Limited Warranty (USA): Audiofrog GB Series products sold in the USA through authorized Audiofrog dealers are warranted to the original purchaser against defects in materials and workmanship for one year after the date of original purchase. They are warranted for an additional year if they are installed by an authorized Audiofrog dealer. Please save your receipt. A valid receipt from an authorized Audiofrog dealer is required for warranty service. If you purchased your GB Series products outside the USA, please consult your local distributor for warranty terms and conditions.