nextlight [VEG8]



Onboard Dimmer & External Dimming connections

WET RATED

FULL WARRANTY **5 YEAR**

IP65








ENERGY USE


nextlight.com

ONBOARD & EXT

Fixture x1 Fixture Hooks x2 NextLight Pro Series Power Cord (10') x1 (see available Power Cord Voltage Options) NextLight Pro Series Control Cable (10') x1

nextlight []

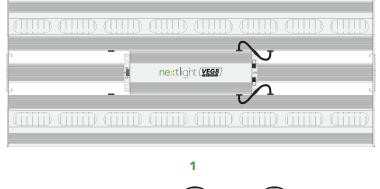




Power Cord Voltage Options

Package Contents

			(\mathbf{Y})
120V	240V	277V	277V
(NEMA 5-15P)	(NEMA 6-15P)	(TWIST LOCK)	

Product Dimensions

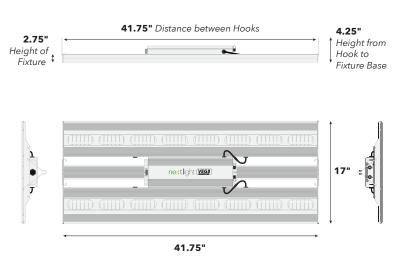

Technical Specifications

PRO SERIES

SPECIFICATION	NEXTLIGHT VEG8 PRO	
Operating Voltage	120-277 VAC	
Operating Frequency	50/60 Hz	
Input Current	1.75A @ 120V, 0.88A @ 240V, 0.76A @ 277V	
PPF	530	
Energy Use	210 Watts (210W @ 277V)	
PPF/Watt	2.5	
Operating Temperature	-4°F to 104°F (-20°C to 40°C)	
BTU Output	720	
Dimensions (in)	41.75 x 17 x 2.75	
Dimensions (mm)	1060 x 426 x 68	
Weight	13 lbs (5.9 kg)	
Warranty	5 Year Full	
Life Rating	Q90 > 50,000 Hours	
Certifications	DLC Hort, CE, UL 8800	
Environment	IP65, Wet Rated	

Onboard Dimmer


The Onboard Dimmer allows you to toggle Dim values of 0%, 25%, 50%, 75%, 100% and EXT for external use with *NextLight Control Pro* or *NextLight Adapt Pro*.



NextLight Full Spectrum LED

NextLight fixtures emit a full spectrum, bright white light which is more sun-like than even your traditional HPS. Using this spectrum you can expect tighter internodal spacing and better overall quality.

NextLight's Full Spectrum is easy to work under and provides the same sun-like qualities plants love without the negatives of high energy requirements and high heat.

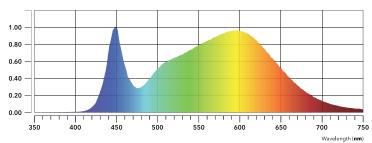

nextlight.com