

HEAT PRESS MODEL No: DW8000 INSTRUCTION MANUAL

CONTACT

Seatle, WA 98105 United States

help@dulytek.com www.dulytek.com

© Dulytek All rights reserved



TABLE OF CONTENTS

PAGE 2	INTRODUCTION Read Before Operating Machinery Copyright Notice Disclaimer
PAGE 2	SAFETY PRECAUTIONS
PAGE 4	HANDLING PRECAUTIONS
PAGE 5	UNPACKING Unpacking Precautions Unpacking Instructions Item Checklist Recommended Parts
PAGE 6	GETTING FAMILIAR DW8000 Press Features and Controls
PAGE 6	OPERATING INSTRUCTIONS Preparing and Starting Press Setting Control Panel Pressing Turning Off Press Cleaning Press Plates
PAGE 10	TECHNICAL SPECIFICATIONS

INTRODUCTION

DULYTEK DW8000 hybrid heat press is a machine engineered and manufactured for personal use or use in research laboratories, pharmaceutical, cosmetic, food processing, textile printing, and brewing industries.

READ BEFORE OPERATING MACHINERY

To avoid accidents, first read SAFETY PRECAUTIONS (PAGE 2) and HANDLING PRECAUTIONS (PAGE 4).

Read this manual carefully to ensure you use the press correctly. After reading and familiarizing yourself with the equipment, store the manual in a safe place for future references

COPYRIGHT NOTICE

Copyright © by DULYTEK. All rights reserved. No part of this document may be reproduced, distributed, or transmitted in any form or by any means, including photocopying, recording, or other electronic or mechanical methods, without the prior written consent of the company. Product design, logos, brand names for various media, and product photos are the sole and exclusive property of DULYTEK.

DISCLAIMER

This unit is intended for LEGAL use only, in accordance with your federal, state, and local laws, ordinances, and regulations.

Please keep this manual in a safe place for future references.

SAFETY PRECAUTIONS

The following precautions are provided to prevent harm or injury to yourself and others. Please make sure to thoroughly read, understand, and follow these precautions before using the product.


SAFETY PRECAUTIONS (continued)

If product is damaged, appears to be damaged, or malfunctions, contact DULYTEK customer service at help@dulytek.com.

WARNING: Follow the warnings below. Otherwise, death or serious injuries may occur.



- Use this product only as described in this manual.
- Keep the equipment out of the reach of children at all times.
- Unplug the heat press from the electrical outlet and let it cool down COMPLETELY before cleaning, performing maintenance, or repair.
- DO NOT operate the product after the appliance malfunctions or is dropped or damaged in any way.
- DO NOT operate the press if the plates are dirty. Clean the plates with isopropyl alcohol and wipe them dry with a clean cloth. Ensure both plates are completely dry before use.
- DO NOT immerse the press, its power cord, and plugs in water or any other liquid.



- DO NOT operate the product with a damaged cord or plug.
- DO NOT leave any cords near a heat source. It can deform the cord or melt its insulation causing electrical shock or fire.
- Always insert the power plug all the way in.
- DO NOT handle a power plug or other components of the press with wet hands.
- When unplugging a power cord, grasp and pull with the plug instead of the
- DO NOT scratch, cut, twist, excessively bend, or tie the cord or put a heavy object on it.
- DO NOT let the power cord drape over the countertop or tabletop, where it can be accidentally tripped over or pulled on.
- DO NOT connect too many power plugs to the same power outlet.
- DO NOT cover the press with a cloth. Doing so may trap heat within and cause fire.
- Remove dust around the plug and power cord with a clean dry cloth. If the



SAFETY PRECAUTIONS (continued)


- surruounding is dusty, humid, or oily, short-circuit may occur, causing a fire.
- DO NOT remove the machine cover.
- DO NOT disassemble the press or make any modifications to the equipment.

HANDLING PRECAUTIONS



- The press must be operated on a hard, level surface, away from its edges to prevent accidental tipping over.
- Work area must be kept clean, tidy, and free of obstructions to the press moving parts.
- Always attach the power cord to the press first, then plug it into the wall outlet.
- To unplug the press, turn OFF the power switch, only then remove the plug from the outlet.
- DO NOT touch the press's hot surfaces. Use heat-resistant gloves or tools. Care must be exercised as serious burns can occur from touching hot platens.





- DO NOT exceed the rated capacity.
- Contact DULYTEK at help@dulytek.com if the equipment does not start or if smoke or unusual odors are detected.
- Always turn the machine OFF and unplug it when done using.



UNPACKING

UNPACKING PRECAUTIONS

WARNING: Keep the packaging materials (cardboard, foam, plastic bags, etc.) out of the reach of children to prevent accidental choking, suffocation, strangulation, and other injuries.

Preserve the shipping container. DO NOT discard or disassemble the shipping box. It is designed to hold the weight of the product and should be used in case you need to return the equipment for repair or warranty maintenance in the future. DO NOT attempt to ship the press in a different container.

UNPACKING INSTRUCTIONS

- 1. Place the box on a large, sturdy, flat surface.
- **INSTRUCTIONS** 2. Open the box and remove the instruction manual and all parts that came with the press.
 - 3. Remove the packaging material and carefully lift the press out of the box.
 - 4. Remove any protective or promotional labels from the press and other parts if applicable.
 - 5. Examine the heat press after unpacking for any damage. If found one, take a picture and contact DULYTEK at help@dulytek.com immediately.

ITEM CHECKLIST

Before starting, please make sure that the following items are included with your press machine. If anything is missing, contact DULYTEK.

- 1. DULYTEK DW8000 Heat Press;
- 2. AC Power Cord:
- 3. Instruction Manual.


RECOMMENDED The following items are recommended use with this machine: **PARTS**

- 1. Parchment paper sheets;
- 2. Filter bags;
- 3. Pre-press mold;
- 4. Humidity packs;
- 5. Collection tools, glass stamp, etc.

Please see PRESSING TIPS (https://bit.ly/2YuM8pR) for more information.

Seattle, WA 98105 United States help@dulytek.com www.dulytek.com © Dulytek All rights reserved

GETTING FAMILIAR

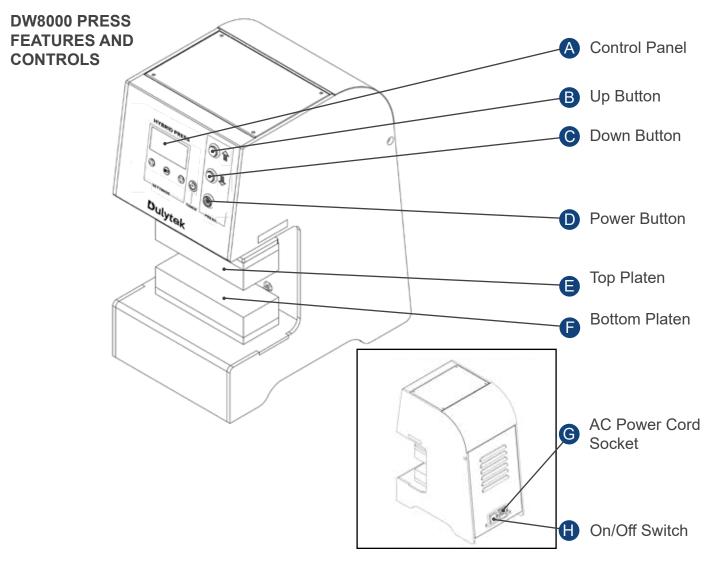

OPERATING INSTRUCTIONS

STARTING PRESS

- PREPARING AND 1. Prepare materials you wish to press. Please see PRESSING TIPS (https:// bit.ly/2YuM8pR) for more information.
 - 2. Make sure the press stands on a flat sturdy countertop, its surfaces are clean and free of residue or dust buildup, and all switches are turned OFF.
 - 3. Insert the AC cord that came with the product into the press AC power cord

OPERATING INSTRUCTIONS (continued)

PREPARING AND STARTING PRESS (continued) socket **G** and then plug its other end into an electrical outlet.

4. Flip On/Off switch \bigoplus and press Power button \bigoplus to turn on the press. The control panel \bigoplus lights up.

SETTING CONTROL PANEL

- 1. Press SET button on the control panel (Fig. 1) to go to the temperature setting mode for the top platen.
- 2. Press Up or Down buttons to select the desired temperature (Fig. 2). The selected temperature is shown on the upper line of the display. Tip: Enter the temperature either in °F or °C; you will be able to select the temperature scale later.
- 3. Press SET button again (Fig. 3) to go to the temperature setting mode for the bottom platen.



- 4. Press Up ♠ or Down ♥ buttons to select the desired temperature (Fig. 4). The selected temperature is shown on the lower line L of the display.
- 5. Press SET button again (Fig. 5) to go to the timer setting mode.
- 6. Press Up (a) or Down (b) buttons to select the desired time in seconds (Fig. 6).



Fig. 4 Fig. 5 Fig. 6

OPERATING INSTRUCTIONS (continued)

SETTING CONTROL PANEL (continued)



- 7. Press SET button to go to the temperature scale selection mode (Fig. 7). Tip: Depending on your machine's default settings, you may either see "F" or "C" on the display indicating the currently selected temperature scale (°F or °C).
- 8. Press Up (a) or Down velocity buttons to select either °F or °C (Fig. 8) OR skip this step if you are satisfied with the current selection.
- 9. Press SET button once more (Fig. 9) to record all control panel's settings. The platens start heating, and the heating icons are now displayed on the screen (Fig. 10).



PRESSING

- 1. Wait until the platens heat up to the desired temperature (Fig. 11). Tip: Once heating is finished, the heating icons are turned off.
- 2. Place the prepared material in the center of the bottom platen [5].
- 3. Press and hold Down **\$\rightarrow\$** button **©** until the machine lowers its top platen **E**.
- 4. Gradually apply more pressure by tapping Down ♣ button ⓒ until the desired pressure is reached. Tip: Excessive weight applied at once

OPERATING INSTRUCTIONS (continued)

PRESSING (continued)

increases the risk of bag blowouts.

- 5. Press Timer 🕥 button on the control panel \Lambda to start the countdown (Fig. 12). The countdown is now shown on the lower line of the display.
- 6. Wait until the countdown ends and the press starts beeping.
- 7. Press Timer 🕥 button again to turn off the timer and stop beeping.
- 8. Press and hold Up 👚 button 📵 to lift up the top platen 🖹.
- 9. Remove the pressed material using heat resistant gloves or tools and exercising extreme caution.

TURNING OFF PRESS

- 1. Turn off the machine by pressing Power button **D** and flipping the power switch **H** when done pressing.
- 2. Unplug and then disconnect the AC power cord from the press.
- 3. Wait until the press cools down completely to clean and store it.

CLEANING PRESS PLATES

- 1. Make sure the press plates are completely cooled down before cleaning.
- 2. Apply a small amount of alcholol to a clean cloth and wipe down the plates until clean. Use rubbing alcohol that contains at least 80% by volume of isopropyl alcohol.
- 3. Wipe plates with a dry clean cloth.
- 4. Repeat these steps for cleaning all associated tools.

TECHNICAL SPECIFICATIONS

PARAMETER	USA MARKET	EU MARKET
Model	DW8000	DW8000-E
Press Force	8000 lb / 4 Ton	
Power	800 ~ 1800 W	
Current	7.3 ~ 16.3 A	3.7 ~ 8.2 A
Voltage	110 V	220 V
Frequency	50 Hz	
Dual Heating Plates	Yes	
Platen Size	3 x 5 inch / 76 x 127 mm	
Temperature Range	up to 356 °F / 180 °C	
Temperature Scale	Fahrenheit / Celsius	
Timer Range	0 - 999 sec	
Product Dimensions	12.2 x 7.9 x 15.7 inch / 31 x 20 x 40 cm	
Product Weight	52.9 lb / 24 kg	
Package Dimensions	15.6 x 11 x 18 inch / 39.5 x 28 x 46 cm	
Package Weight	65 lb / 29.5 kg	
Certifications	CE / RoHS	