




Accuflex Industrial Hose, Ltd
 36663 Van Born Road, Suite 300
 Romulus, MI 48174
Phone: (734) 713-4100
Fax: (734) 713-4190
Email: sales@accuflex.com

BEVLEX® SERIES 170 POLYESTER-REINFORCED POLYETHYLENE BEVERAGE HOSE

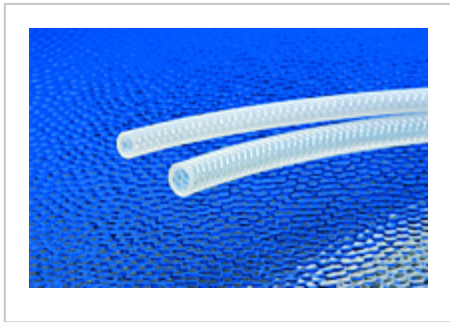

1

Item #	Length	Standard Package	Nominal ID	Nominal OD	Working Pressure at 70°F	Working Pressure at 122°F	Weight	Min. Bend Radius	Clamp Size
<u>170-041X2-0</u>	100 ft	Boxed Coil	0.265 in	0.457 in	300 psi	150 psi	6.2 lb 2.8 kg	1.10 in	13.3 mm
<u>170-045X2-0</u>	500 ft	Boxed Spool	0.265 in	0.457 in	300 psi	150 psi	25.1 lb 11.4 kg	1.10 in	13.3 mm
<u>170-045X6-0</u>	500 ft	Boxed Spool	0.265 in	0.517 in	300 psi	150 psi	34.3 lb 15.6 kg	1.10 in	14.0 mm
<u>170-063X0-0</u>	300 ft	Boxed Spool	0.380 in	0.593 in	300 psi	150 psi	22.9 lb 10.4 kg	1.75 in	15.7 mm
<u>170-065X0-0</u>	500 ft	Reel	0.380 in	0.593 in	300 psi	150 psi	40.4 lb 18.3 kg	1.75 in	15.7 mm

Item #	Length	Standard Package	Nominal ID	Nominal OD	Working Pressure at 70°F	Working Pressure at 122°F	Weight	Min. Bend Radius	Clamp Size
<u>170-061X1-0</u>	100 ft	Boxed Coil	0.380 in	0.635 in	300 psi	150 psi	15.0 lb 6.8 kg	1.75 in	17.0 mm
<u>170-063X1-0</u>	300 ft	Boxed Spool	0.380 in	0.635 in	300 psi	150 psi	45.1 lb 20.5 kg	1.75 in	17.0 mm
<u>170-083X0-0</u>	300 ft	Wrapped Coil	0.510 in	0.740 in	250 psi	125 psi	26.9 lb 12.2 kg	3.00 in	19.8 mm
<u>170-085X0-0</u>	500 ft	Reel	0.510 in	0.740 in	250 psi	125 psi	49.1 lb 22.3 kg	3.00 in	19.8 mm
<u>170-041X2-1</u>	100 ft	Boxed Coil	0.265 in	0.457 in	300 psi	150 psi	6.2 lb 2.8 kg	1.10 in	13.3 mm
<u>170-045X2-1</u>	500 ft	Boxed Spool	0.265 in	0.457 in	300 psi	150 psi	25.1 lb 11.4 kg	1.10 in	13.3 mm
<u>170-045X6-1</u>	500 ft	Boxed Spool	0.265 in	0.517 in	300 psi	150 psi	34.3 lb 15.6 kg	1.10 in	14.0 mm
<u>170-063X0-1</u>	300 ft	Boxed Spool	0.380 in	0.593 in	300 psi	150 psi	22.9 lb 10.4 kg	1.75 in	15.7 mm
<u>170-065X0-1</u>	500 ft	Reel	0.380 in	0.593 in	300 psi	150 psi	40.4 lb 18.3 kg	1.75 in	15.7 mm
<u>170-061X1-1</u>	100 ft	Boxed Coil	0.380 in	0.635 in	300 psi	150 psi	15.0 lb 6.8 kg	1.75 in	17.0 mm
<u>170-063X1-1</u>	300 ft	Boxed Spool	0.380 in	0.635 in	300 psi	150 psi	45.1 lb 20.5 kg	1.75 in	17.0 mm
<u>170-083X0-1</u>	300 ft	Wrapped Coil	0.510 in	0.740 in	250 psi	125 psi	26.9 lb 12.2 kg	3.00 in	19.8 mm
<u>170-085X0-1</u>	500 ft	Reel	0.510 in	0.740 in	250 psi	125 psi	49.1 lb 22.3 kg	3.00 in	19.8 mm

Item #	Length	Standard Package	Nominal ID	Nominal OD	Working Pressure at 70°F	Working Pressure at 122°F	Weight	Min. Bend Radius	Clamp Size
<u>170-041X2-2</u>	100 ft	Boxed Coil	0.265 in	0.457 in	300 psi	150 psi	6.2 lb 2.8 kg	1.10 in	13.3 mm
<u>170-045X2-2</u>	500 ft	Boxed Spool	0.265 in	0.457 in	300 psi	150 psi	25.1 lb 11.4 kg	1.10 in	13.3 mm
<u>170-045X6-2</u>	500 ft	Boxed Spool	0.265 in	0.517 in	300 psi	150 psi	34.3 lb 15.6 kg	1.10 in	14.0 mm
<u>170-063X0-2</u>	300 ft	Boxed Spool	0.380 in	0.593 in	300 psi	150 psi	22.9 lb 10.4 kg	1.75 in	15.7 mm
<u>170-065X0-2</u>	500 ft	Reel	0.380 in	0.593 in	300 psi	150 psi	40.4 lb 18.3 kg	1.75 in	15.7 mm
<u>170-061X1-2</u>	100 ft	Boxed Coil	0.380 in	0.635 in	300 psi	150 psi	15.0 lb 6.8 kg	1.75 in	17.0 mm
<u>170-063X1-2</u>	300 ft	Boxed Spool	0.380 in	0.635 in	300 psi	150 psi	45.1 lb 20.5 kg	1.75 in	17.0 mm
<u>170-083X0-2</u>	300 ft	Wrapped Coil	0.510 in	0.740 in	250 psi	125 psi	26.9 lb 12.2 kg	3.00 in	19.8 mm
<u>170-085X0-2</u>	500 ft	Reel	0.510 in	0.740 in	250 psi	125 psi	49.1 lb 22.3 kg	3.00 in	19.8 mm