55" Economy Professional Monitors



Budget-friendly 24/7 commercial grade 4K AV monitor

4K Display


The 4K Ultra HD display delivers incredible image quality with resolution four times higher than Full HD. Optimised for both near and far viewing distances, the display allows your content to take centre stage for all your visual communication.





Attach Devices

Connecting external devices like a PC or media player to the monitor is easy. Attach your source by the HDMI input or the VGA and 3.5mm audio jack inputs.



- 1. RS-232
- 2. HDMI In x2 (Supports HDMI CEC Commands)
- 3. VGA In
- 4. PC Audio In
- 5. SPDIF
- 6. USB 2.0



Portrait or Landscape Orientation



Integrated Speakers



IPS Panel



Narrow Bezel



Optional Android Media Player



RS-232 Control



Supports HDMI CEC Commands



24/7 Commercial Grade




Other Sizes Available on Request



3 Year Warranty



Lifetime Technical Support

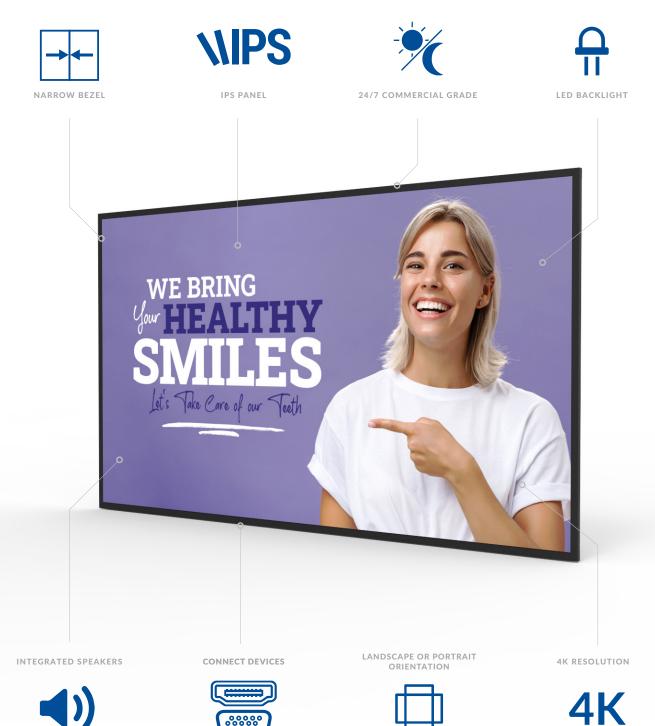










Specification Table

Brightness (cd/m²) 350 Colour			
Display Area (mm)			43 Inch
Bezel Size (mm)	Panel	Resolution	3840x2160
Panel Pikel Pitch 0.315x0.315 Panel Aspect Ratio 16:9 Brightness (cd/m²) 350 Colour 1.07B Viewing Angle 178° Ontrast Ratio 1200:1 Audio Speaker Type 2x5W/80 AV Ports HDMI In (x2), VGA In, Audio Socket (3.5mm), SPDIF, USB 2.0, RS-232 In Power Power Consumption (W) \$140 Input Voltage AC100-240V (50Hz-60Hz) Package Size (WxHxD mm) 1243.2x714x69.6 Package Size (WxHxD mm) 1364x824x154 Mechanical YeSA Holes (mm) 400x400 M6 Net Weight (kg) TBC Gross Weight (kg) TBC Gross Weight (kg) TBC Cervironmental Operating Temperature 0°C to 40°C Cervironmental Operating Temperature 0°C to 65°C Cervironmental Operating Temperature 10% to 80% Environmental Remote Control, User Manual, 1.5m Power Cable, 1.5m HDMI Cable Accessories Included Remote Control, User Manual, 1.5m Power Cable, 1.5m HDMI Cable </td <td>Display Area (mm)</td> <td>1215.4x686.2</td>		Display Area (mm)	1215.4x686.2
Panel Remote Panel R		Bezel Size (mm)	13.9
Brightness (cd/m²) 350 Colour		Pixel Pitch	0.315x0.315
Colour 1.07B Viewing Angle 178° Contrast Ratio 1200:1 Audio Speaker Type 2x5W/8Ω AV Ports Ports HDMI In (x2), VGA In, Audio Socket (3.5mm), SPDIF, USB 2.0, RS-232 In Power Consumption (W) \$140 Input Voltage AC100-240V (50Hz-60Hz) Input Voltage AC100-240V (50Hz-60Hz) Package Size (WxHxD mm) 1243.2x714x69.6 Package Size (WxHxD mm) 1364x824x154 VESA Holes (mm) 400x400 M6 Net Weight (kg) TBC Gross Weight (kg) TBC Gross Weight (kg) TBC Gross Weight (kg) TBC Operating Temperature 0°C to 40°C Operating Humidity 10% to 80% Storage Temperature 10°C to 55°C Operating Humidity 10% to 80% Accessories Included Remote Control, User Manual, 1.5m Power Cable. 1.5m HDMI Cable Optional Wall Mount, Floor Stand/Trolley, Ceiling Mount, Table Stand Warranty Warranty Period 3 Year Warranty Warranty Period 2 Year Warranty		Aspect Ratio	16:9
Viewing Angle 178° Contrast Ratio 1200:1 Audio Speaker Type 2x5W/8Q AV Ports Ports HDMI In (x2), VGA In, Audio Socket (3.5mm), SPDIF, USB 2.0, RS-232 In Power 1140 1140 Property Input Voltage AC100-240V (50Hz-60Hz) Mechanical Package Size (WXHXD mm) 1243:2x714x69.6 Package Size (WXHXD mm) 1364x824x154 Mechanical VESA Holes (mm) 400x400 M6 Net Weight (kg) TBC Gross Weight (kg) TBC For Save Weight (kg) TBC Coperating Temperature 0°C to 40°C Storage Temperature 10°C to 55°C Operating Humidity 10% to 80% Storage Humidity 10% to 90% Accessories Included Remote Control, User Manual, 1.5m Power Cable. 1.5m HDMI Cable Optional Wall Mount, Floor Stand/Trolley, Ceiling Mount, Table Stand Warranty		Brightness (cd/m²)	350
Contrast Ratio 1200:1 Audio Speaker Type 2x5W/8Ω AV Ports Ports HDMI In (x2), VGA In, Audio Socket (3.5mm), SPDIF, USB 2.0, RS-232 In Power = 140 Power Input Voltage AC100~240V (50Hz~60Hz) Mechanical Unit Size (WXHXD mm) 1243.2x714x69.6 Package Size (WXHXD mm) 1364x824x154 Mechanical VESA Holes (mm) 400x400 M6 Net Weight (kg) TBC Gross Weight (kg) TBC Gross Weight (kg) TBC Storage Temperature 0°C to 40°C Operating Humidity 10% to 80% Storage Humidity 10% to 80% Storage Humidity 10% to 90% Accessories Included Remote Control, User Manual, 1.5m Power Cable. 1.5m HDMI Cable Warranty Warranty Period 3 Year Warranty		Colour	1.07B
Audio Speaker Type 2x5W/8Ω AV Ports Ports HDMI In (x2), VGA In, Audio Socket (3.5mm), SPDIF, USB 2.0, RS-232 In Power 140 140 Input Voltage AC100~240V (50Hz~60Hz) Mechanical Unit Size (WxHxD mm) 1243.2x714x69.6 Package Size (WxHxD mm) 1364x824x154 VESA Holes (mm) 400x400 M6 Net Weight (kg) TBC Gross Weight (kg) TBC Operating Temperature 0°C to 40°C Storage Temperature -10°C to 55°C Operating Humidity 10% to 80% Storage Humidity 10% to 90% Accessories Included Remote Control, User Manual, 1.5m Power Cable. 1.5m HDMI Cable Optional Wall Mount, Floor Stand/Trolley, Ceiling Mount, Table Stand Warranty Warranty		Viewing Angle	178°
Power		Contrast Ratio	1200:1
Power Dower Power Consumption (W) \$140 Input Voltage AC100~240V (50Hz~60Hz) Input Voltage AC100~240V (50Hz~60Hz) Mechanical Unit Size (WxHxD mm) 1243.2x714x69.6 Package Size (WxHxD mm) 1364x824x154 VESA Holes (mm) 400x400 M6 Net Weight (kg) TBC Gross Weight (kg) TBC Operating Temperature 0°C to 40°C Storage Temperature -10°C to 55°C Operating Humidity 10% to 80% Storage Humidity 10% to 90% Accessories Included Remote Control, User Manual, 1.5m Power Cable, 1.5m HDMI Cable Warranty Wall Mount, Floor Stand/Trolley, Ceiling Mount, Table Stand Warranty Warranty Period 3 Year Warranty	Audio	Speaker Type	2x5W/8Ω
Input Voltage	AV Ports	Ports	HDMI In (x2), VGA In, Audio Socket (3.5mm), SPDIF, USB 2.0, RS-232 In
Input Voltage	Power	Power Consumption (W)	≤140
Mechanical Package Size (WxHxD mm) 1364x824x154 Mechanical VESA Holes (mm) 400x400 M6 Net Weight (kg) TBC Gross Weight (kg) TBC Environmental Operating Temperature 0°C to 40°C Storage Temperature -10°C to 55°C Operating Humidity 10% to 80% Storage Humidity 10% to 90% Accessories Included Remote Control, User Manual, 1.5m Power Cable. 1.5m HDMI Cable Optional Wall Mount, Floor Stand/Trolley, Ceiling Mount, Table Stand Warranty Warranty		Input Voltage	AC100~240V (50Hz~60Hz)
Mechanical VESA Holes (mm) Net Weight (kg) Gross Weight (kg) TBC Operating Temperature O°C to 40°C Storage Temperature Operating Humidity Toward to 80% Storage Humidity Toward to 90% Accessories Included Optional Warranty Warranty Warranty Accessories VESA Holes (mm) 400x400 M6 TBC TBC O°C to 40°C 10°C to 55°C 10°C to 55°C 10°C to 55°C 10°C to 90% Accessories Accessories Warranty 400x400 M6 TBC TBC TBC Operating Temperature 10°C to 40°C	Mechanical	Unit Size (WxHxD mm)	1243.2x714x69.6
Net Weight (kg) Gross Weight (kg) TBC TBC Operating Temperature O°C to 40°C Storage Temperature Operating Humidity TBC Operating Humidity TBC Operating Temperature O°C to 40°C 10°C to 55°C Operating Humidity T0% to 80% Storage Humidity T0% to 90% Accessories Included Remote Control, User Manual, 1.5m Power Cable. 1.5m HDMI Cable Optional Warranty Warranty Warranty		Package Size (WxHxD mm)	1364x824x154
Gross Weight (kg) Penvironmental Gross Weight (kg) Operating Temperature O°C to 40°C Storage Temperature Operating Humidity 10% to 80% Storage Humidity 10% to 90% Accessories Included Optional Warranty Warranty TEC O°C to 40°C 10°C to 55°C Operating Humidity 10% to 80% Remote Control, User Manual, 1.5m Power Cable, 1.5m HDMI Cable Wall Mount, Floor Stand/Trolley, Ceiling Mount, Table Stand 3 Year Warranty		VESA Holes (mm)	400x400 M6
Operating Temperature 0°C to 40°C Storage Temperature -10°C to 55°C Operating Humidity 10% to 80% Storage Humidity 10% to 90% Accessories Included Remote Control, User Manual, 1.5m Power Cable. 1.5m HDMI Cable Optional Warranty Warranty Warranty Operating Temperature 0°C to 40°C -10°C to 55°C -10°C		Net Weight (kg)	TBC
Storage Temperature -10°C to 55°C Operating Humidity 10% to 80% Storage Humidity 10% to 90% Accessories Included Remote Control, User Manual, 1.5m Power Cable. 1.5m HDMI Cable Optional Warranty Warranty Warranty		Gross Weight (kg)	TBC
Operating Humidity 10% to 80% Storage Humidity 10% to 90% Accessories Included Remote Control, User Manual, 1.5m Power Cable. 1.5m HDMI Cable Optional Wall Mount, Floor Stand/Trolley, Ceiling Mount, Table Stand Warranty Warranty	Environmental	Operating Temperature	0°C to 40°C
Operating Humidity 10% to 80% Storage Humidity 10% to 90% Accessories Included Remote Control, User Manual, 1.5m Power Cable. 1.5m HDMI Cable Optional Warranty Period 3 Year Warranty Warranty		Storage Temperature	-10°C to 55°C
Accessories Included Remote Control, User Manual, 1.5m Power Cable. 1.5m HDMI Cable Wall Mount, Floor Stand/Trolley, Ceiling Mount, Table Stand Warranty Warranty Warranty		Operating Humidity	10% to 80%
Accessories Optional Wall Mount, Floor Stand/Trolley, Ceiling Mount, Table Stand Warranty Period 3 Year Warranty		Storage Humidity	10% to 90%
Optional Wall Mount, Floor Stand/Trolley, Ceiling Mount, Table Stand Warranty Period 3 Year Warranty Warranty	Accessories	Included	Remote Control, User Manual, 1.5m Power Cable. 1.5m HDMI Cable
Warranty		Optional	Wall Mount, Floor Stand/Trolley, Ceiling Mount, Table Stand
	Warranty	Warranty Period	3 Year Warranty
		Technical Support	Lifetime

Errors and omissions excepted



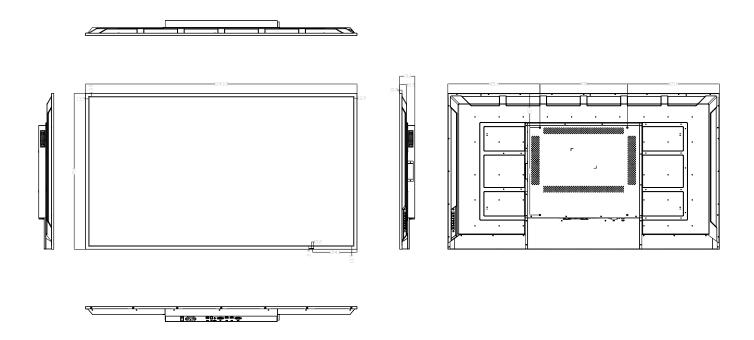

Why Choose Our Commercial Display Solutions?



From the moment you receive your product, throughout the duration of your warranty and even after your warranty has expired we are here to support you. If you require any assistance setting up or using your product, or have any problems at all, we can provide free technical support via telephone and email.



On-site Support and Maintenance

If needed, we can provide an installation service for any of our products. We can also set up service-level agreements for larger projects that require maintenance contracts.



Extended Warranty*

All of our commercial display products come with a 3 year commercial warranty as standard but if you want to extend this you can upgrade this to cover a 5 year period at point of purchase.



Training

As well as providing free remote CMS training sessions and webinars we can also visit you to deliver bespoke training for our software and hardware*.



Advanced Replacements[†] Should your display suffer from any kind of hardware failure during the warranty period we will send you an advanced replacement and arrange for your old display to be collected, free of charge. This ensures no downtime where you are without a screen.



Custom Product
Testing &
Configuration

If you need us to test third party software or a website, or configure your screen in a particular way before it is dispatched (e.g. in a particular orientation or network mode), we can do so to make your life easier.



3D Rendering

Want to know how a particular screen will look once installed? Send us a photo of the location and we will create a 3D rendering of any screen in situ to help you to visualise how amazing it will look.



Logistics Support

We hold more stock in our UK warehouse than any other manufacturer so we can help you meet tight deadlines. For last minute orders we can also offer special express or morning delivery options*. We also carry out UK based quality control checks on every display before it leaves our warehouse.



Project Support

If you need to loan a sample unit to test we'd be more than happy to arrange this. We can also provide a rental service for temporary projects*.



Customisation*

Your display can be customised to suit your requirements by adding your logo or printed graphics or even tailoring the colour of a display. We can also carry out hardware modifications to existing products or manufacture bespoke solutions for special projects.



As well as being able to provide accessories and add-ons, such as extra remote controls, NUC PCs and video wall controllers, we can also supply custom made flight cases which are great if a display needs to be moved safely from place to place.