


POWER BUSHING ASSEMBLIES 23 KV CLASS, 150 KV BIL, 19.5" CREEP

These bushings are designed for transformer, switchgear, entrance, and special power apparatus applications. The electrical ratings given are based on use in a liquid filled transformer with the lower end of the bushing under oil. Bushings are fully oil and watertight both at the top terminal, and the mounting flange. Porcelain is gray glazed all over and the top skirts are designed for outdoor application.

Flanges and washers are non-magnetic. Constant gasket pressure to top terminal is maintained by a disc spring to compensate for the thermal expansion and contraction of the copper stud. Nitrile (Buna-N) gasket is standard. For ordering assemblies with the cork-rubber composition gaskets add the suffix "C" to the part number.

FLANGE DETAIL ON PAGE NO. PB-6

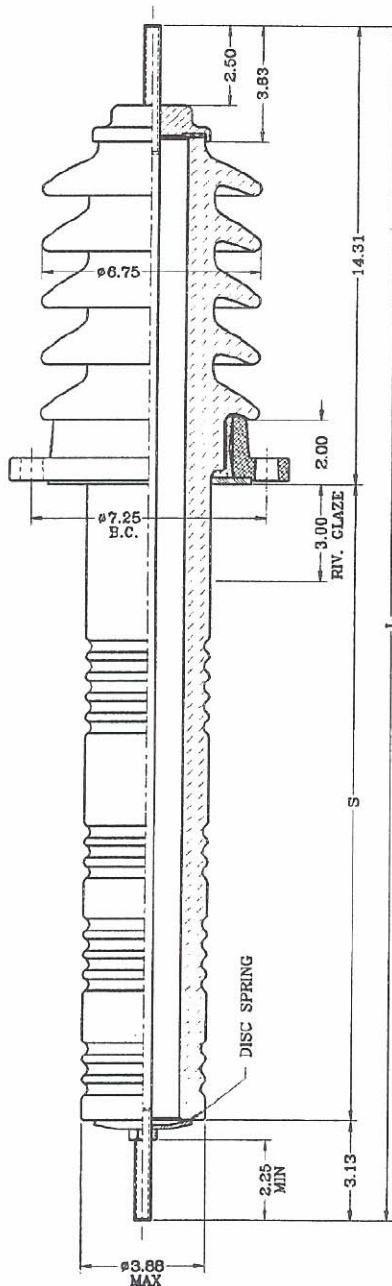

STUD SIZE	PART NUMBER	L	S
.500-13 UNC-2A 208A	354100	27.25	9.81
	354101	30.25	12.81
	354102	34.25	16.81
	354103	37.25	19.81
.625-18 UNF-2A 417 A	354105	27.25	9.81
	354106	30.25	12.81
	354107	34.25	16.81
	354108	37.25	19.81
.750-16 UNF-2A 600 A	354110	27.25	9.81
	354111	30.25	12.81
	354112	34.25	16.81
1.000-14 UNS-2A 800 A	354113	37.25	19.81
	354115	27.25	9.81
	354116	30.25	12.81
1.125-12 UNF-2A 1000 A	354117	34.25	16.81
	354118	37.25	19.81
	354120	27.25	9.81
1.250-12 UNF-2A 1200 A	354121	30.25	12.81
	354122	34.25	16.81
	354123	37.25	19.81
1.250-12 UNF-2A 1200 A	354125	27.25	9.81
	354126	30.25	12.81
	354127	34.25	16.81
1.500-12 UNF-2A 1700 A	354128	37.25	19.81
	354130	27.25	9.81
	354131	30.25	12.81
1.750-12 UN-2A 2300 A	354132	34.25	16.81
	354133	37.25	19.81
	354140	27.25	9.81
2.000-12 UN-2A 2900 A	354141	30.25	12.81
	354142	34.25	16.81
	354143	37.25	19.81
	354145	27.25	9.81
2.000-12 UN-2A 2900 A	354146	30.25	12.81
	354147	34.25	16.81
	354148	37.25	19.81