



ML-WM-4999

FLOOD LIGHT & AREA LIGHT



DESCRIPTION

LED Full Cut-off Wallpack provides efficient lighting to where you needed most. It is Dark Sky friendly and provides exceptional lumens per watt. It has a Type III Forward throw directing light for maximum coverage. With industrial grade polycarbonate lens, this fixture is great for schools, parks, correctional facilities, and other public areas.

Specification Features



Construction

► Industrial grade die-cast aluminum alloy body is tough on the elements and allow the luminaire to withstand the harshest of conditions.

Optical System

► Next generation LEDs combined with the best-in-class UV stablized commercial grade polycarbonate lens provide the most efficient lighting system. Optical system is engineered to provide professional grade light distribution and uniformity.

Electrical

► Long lasting LED coupled with UL Listed Drivers provide an electrical system that will stand the test of time. Universal voltage allow the luminaire to be used in multi-faceted environments.

Finish

► Luminaire is electrostatically coated with UV stabilized powder coat providing years of worry-free service.

Certification

► cUL and UL Listed. Listed for Wet Locations. DLC Premium certified.

Ordering information

Model No.	System Watts	Input Voltage	CRI	Color Temp	Distribution	Option		Finish	Starting Temp
						Accessories	Mounting		
ML-WM-4999-46W-4K-UV	46W	120-277V	70+	3000 K	Type III	Photocontrol	Wall Mount	Bronze	-40°C
ML-WM-4999-80W-4K-UV	80W			4000 K	Type IV				
				5000 K	Type V				

* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

Product Description

Product Dimensions



Proprietary Optical Control

Specifically designed lens Type III, IV, and V allow architects maximum freedom to design any layout without restraint. These optics are engineered for maximum light output.



Redesigned Door Frame

The driver compartment access door has been reversed to open away from the mounting surface. This allows even more space for installers to work with.



Integrated Heatsink

Integrated cooling fin provides excellent thermal dissipation. This design allows the fixture to have extremely long lifetime hours.

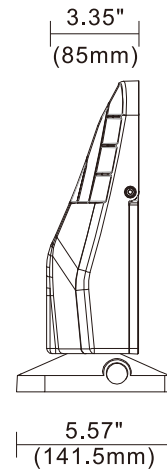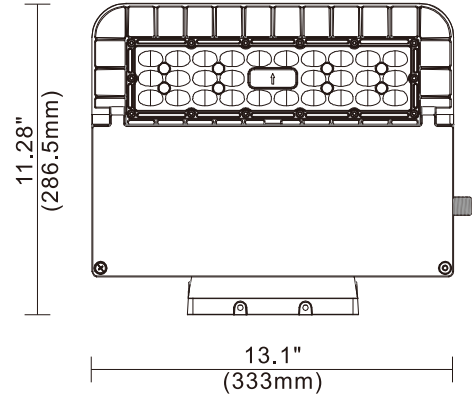

Performance Data

* Lumen and Efficacy shows the highest wattage at 5000K

Model NO.	System Watts	Lumens	LPW
ML-WM-4999-46W-4K-UV	46W	6095	132.5
ML-WM-4999-80W-4K-UV	80W	11024	137.8

* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.