

## ML-WM-301/302/303N

## LED SURFACE MOUNT LIGHT

### DESCRIPTION

This trapezoid full cut-off wall pack is elegant as it is functional. With high performance LEDs and long lasting driver, this fixture provides effective lighting all around. It can be used around factories, restaurants, shopping centers, etc.



### Specification Features



#### Construction

► Industrial grade die-cast aluminum alloy body is tough on the elements and allow the luminaire to withstand the harshest of conditions.

#### Optical System

► Next generation LEDs combined with the best-in-class UV stablized commercial grade polycarbonate lens provide the most efficient lighting system. Optical system is engineered to provide professional grade light distribution and uniformity.

#### Electrical

► Long lasting LED coupled with UL Listed Drivers provide an electrical system that will stand the test of time. Universal voltage allow the luminaire to be used in multi-faceted environments.

#### Finish

► Luminaire is electrostatically coated with UV stabilized powder coat providing years of worry-free service.

#### Certification

► cUL and UL Listed. Listed for Wet Locations. DLC Premium certified.

### Ordering information

Model No.	System Watts	Input Voltage	CRI	Color Temp	Finish	Reflector	Option
ML-WM-301N	30W	120-277 VAC	70+	3000 K	Bronze	Forward Throw	No Sensor
	50W			4000 K			Photocell
	72W			5000 K			Occupancy Sensor
ML-WM-302N	30W	120-277 VAC	70+	3000 K	Bronze	Wide Throw	Emergency Driver
	50W			4000 K			10KV Surge
	72W			5000 K			
ML-WM-303N	40W	120-277 VAC	70+	3000 K	Bronze	Wide Throw	

\* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

**Product Description**



Included Quick Mount plate for easy and contractor friendly installation.






Low glare lens providing visual comfort.



Smart controller for a range of wattages to choose from (70W series only)

**Product Dimensions**

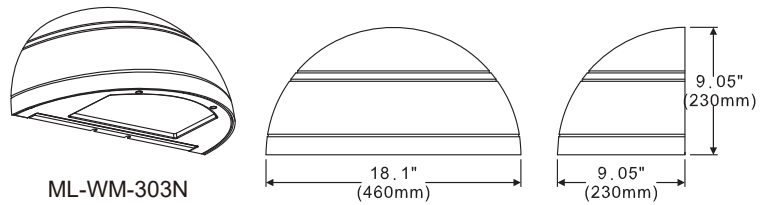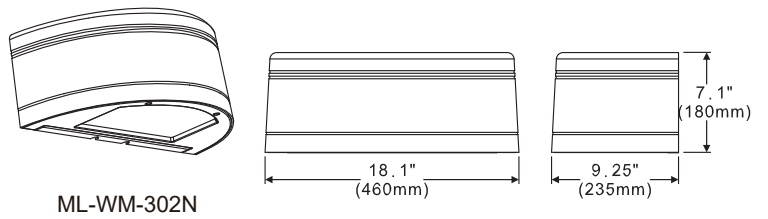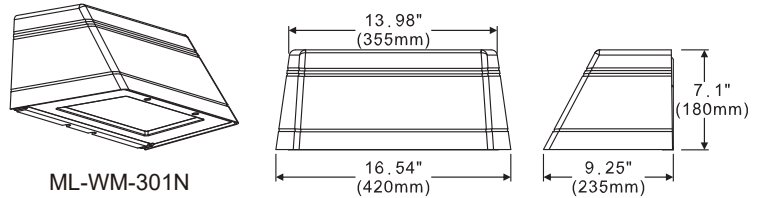

**Available Options**



ML-WM-301N



ML-WM-302N



ML-WM-303N






Forward Throw (FT)



Wide Throw (WT)



Up & Down (U&D)



**Performance Data**

\* Lumen and Efficacy shows the highest wattage at 5000K

Model NO.	System Watts	Lumens	Efficacy
ML-WM-301N	30W	3811 lm**	131 lm/W**
	50W	6410 lm**	125 lm/W**
	15/30/50/72W	8407 lm**	117 lm/W**
ML-WM-302N	30W	3811 lm**	131 lm/W**
	50W	6410 lm**	125 lm/W**
	15/30/50/72W	8621 lm**	120 lm/W**
ML-WM-301N	40W	6056 lm**	151 lm/W**

\* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.