



The FloMAX 2 inch and 3 inch break away valves are constructed of zinc plated steel and anodized aircraft grade aluminum. The valves are designed with three shear studs that will break at a designated force when mounted correctly using our factory approved mount. This will help protect expensive refueling equipment and help prevent catastrophic fuel spillage.

- Eliminates expensive equipment damage.
- Eliminates catastrophic spills.
- 250 PSI pressure rating.

BAV's must be used with mounting brackets

See BAV2M below

BAV3 3" NPT Valve

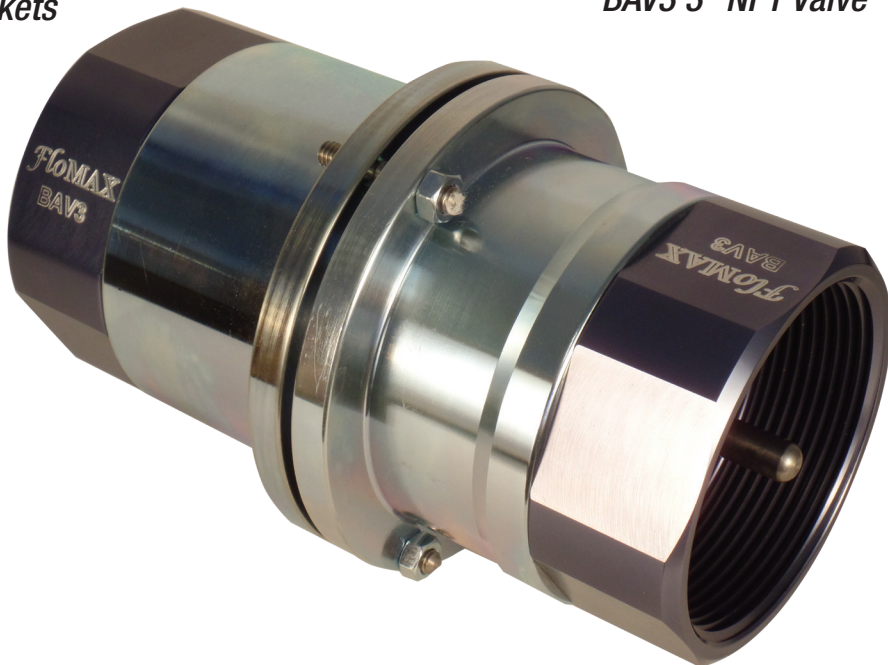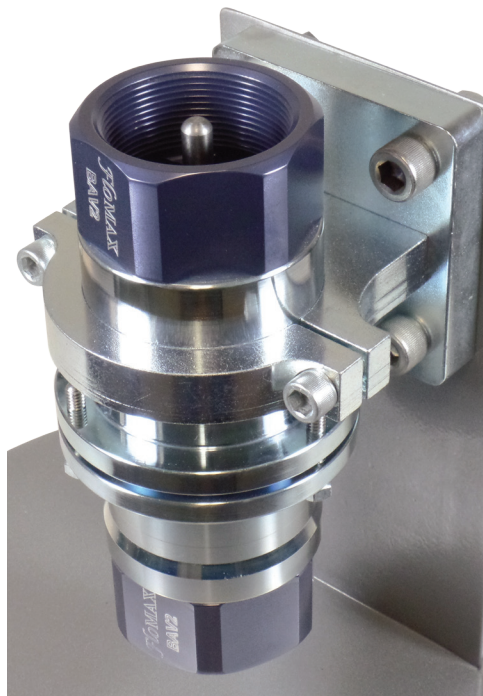

BAV2 2" NPT Valve



BAV2M



Part No.	Description
BAV	Break Away Valve 2 Inch
BAV2M	Break Away Valve Mount 2 Inch
BAV3	Break Away Valve 3 Inch
BAV3M	Break Away Valve Mount 3 Inch
BAV-K1	Break Away Valve Replacement Kit