



XD30 HOSE REEL SERIES

Graco's XD30 Series Hose Reels are used in applications requiring longer-range dispense and higher capacity than the standard XDX10 and XDX20 Series.

The Compact pedestal and spool fits into tight spaces and can accommodate 30-75 foot (9.1-22.8 meters) hose capacity for a wide variety of applications.

Typical fluids: Petroleum- and synthetic-based oils, diesel fuel, air, water, antifreeze, windshield washer fluid, pressure wash, waste oil and diesel exhaust fluid (DEF).


Ideal for rugged indoor and outdoor use in heavy-duty truck dealerships, fleet maintenance, mining maintenance, public works garages, construction vehicle maintenance, agriculture and service trucks.

FEATURES:

- Spring Adjustment - Increase or decrease spring tension while reel is pressurized with fluid.
- Full-Flow Swivel - Maximize material flow with minimal pressure drop for faster fills to get more vehicles through your shop.
- Optional Adjustable Arm - Easily change the arm position for your application, order with arm (HS models) or without (HN models).
- Durable Finish - Baked-on enamel finish protects reel from corrosion.
- Large Hose Capacity with Small Profile - Compact pedestal and spool fits into tight spaces and can accommodate 30-75 foot (91-228 meters) hose capacity for a wide variety of applications.

DIMENSIONS:

| | |
|---|------------------|
| A | 9.0 in (229mm) |
| B | 21.50 in (546mm) |
| C | 25.96 in (660mm) |
| D | 22.12 in (562mm) |
| E | 23.10 in (588mm) |
| F | 27.60 in (701mm) |

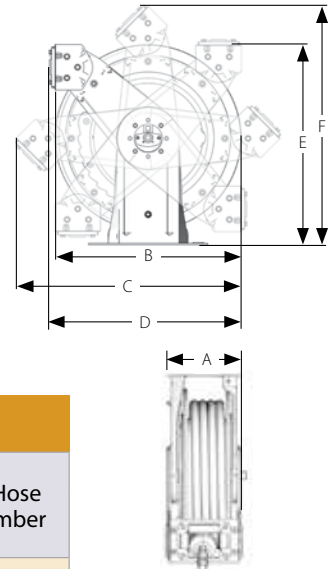

XD30 SERIES OPTIONS:

| Fluid | Hose | | Connection Size | | Max Pressure psi (bar) | Reel & Hose Part Number |
|---|---------------|------------------|-----------------|------------|---------------------------|----------------------------|
| | ID mm (in) | Length m (ft) | Inlet | Outlet | | |
| Air / Water Antifreeze Windshield Washer Fluid | 13 (1/2) | 23 (75) | 1/2 npsm(m) | 1/2 npt(m) | 300 (20.7) | HSLC8F |
| | 19 (3/4) | 15 (50) | 3/4 npsm(m) | 3/4 npt(m) | 300 (20.7) | HSLD5F |
| Oil | 13 (1/2) | 23 (75) | 1/2 npsm(m) | 1/2 npt(m) | 1500 (103) | HSMC8F |
| | 19 (3/4) | 15 (50) | 3/4 npsm(m) | 3/4 npt(m) | 1250 (86) | HSMD5B HSMD5F |
| | 19 (3/4) | 15 (50) | 3/4 npsm(m) | 3/4 npt(f) | 2000 (138) | HSMDDA* HSMDDF* |
| Grease | 13 (1/2) | 15 (50) | 1/2 npsm(m) | 1/2 npt(m) | 5,000 (345) | HSHC5F |
| | 13 (1/2) | 15 (50) | 1/2 npsm(m) | 1/2 npt(f) | 5,000 (345) | HSHCDF* |
| Pressure Wash | 9.5 (3/8) | 23 (75) | 1/2 npsm(m) | 3/8 npt(m) | 4,000 (276) | HSPB8F |
| Fuel/Evacuation | 25 (1) | 9 (30) | 3/4 npsm(m) | 1 npt(m) | 125 (8.6) | HSLE3F |

*Bare reels: XDX 10/20 Series: XDH5D#

Colour options: Blue = B, Yellow = F, Black = D, Red = C, White = A