

PETRO INDUSTRIAL



petroind.com



12,7 & 19mm ID HOSE REWIND HOSE REELS

FEATURES:

- Spring Rewind High Capacity Hose Reel.
- Suitable for use with Lubricants.
- 160 bar pressure rating.
- Fixed Design - Non Swivelling.
- Synthetic black rubber hose.
- Galvanised fittings.
- Swivelling joint 90° galvanised.
- Polyurethane seals.

HOSE REEL OPTIONS:


Code	Description	Hose Size & Length
070-1306-415-CATA	HOSE REEL Meclube Spring Rewind 15m x 12.7mm id Hose Model F-460	12.7mm (1/2") x 15m
070-1506-515-CATA	HOSE REEL Meclube Spring Rewind 15m x 19mm id Hose Model F-555	19mm (3/4") x 15m



Wall application with inside output hose.



Wall application with outside output hose.

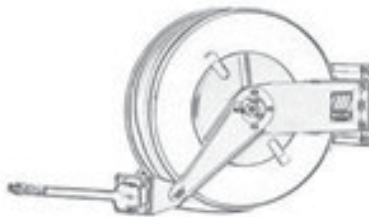

Wall & ceiling application with frontal output hose.



Bench application with frontal output hose.

PETRO INDUSTRIAL



petroind.com



SHIPPING:

Code	Description	Weight (kg)	Dimensions (mm)
070-1306-415-CATA	12.7mm id Hose Model F-460	23	500L x 158W x 480H
070-1506-515-CATA	19mm id Hose Model F-555	53	600L x 250W x 590H

PETRO Contact Information

AFRICA

South Africa

Factory 14 Bentonite Street
Alrode, Alberton, Johannesburg
South Africa
P: +27 (0)11 864 7758
F: +27 (0) 11 864 1649
E: sales@petroindustrial.co.za

UAE

Dubai

Office LB17330, Lobby Building 17
Jebel Ali Free Zone
PO Box 18602
Dubai, United Arab Emirates
P: +971 488 76688
F: +971 488 76932
E: salesuae@petroind.com

AUSTRALIA

Eastern Australia

Factory 2, 106 Potassium Street
PO Box 407
Narangba QLD 4504
P: 07 3204 9558
F: 07 3293 4852
E: sales@petroindustrial.com.au

Western Australia

173 Mulgul Road, Malaga WA 6090 AU
P: +61 (8) 6305 0855
E: saleswa@petroperth.com.au

PETRO INDUSTRIAL



petroind.com