



ISO 
9001 : 2008

Pressure Regulating Valve INSTALLATION AND USE

Item code: AVTP2520

The Pressure Regulating valve ensures the smooth running of all distributor pumps working from overhead tanks (maximum height 6 m).



It avoids the overpressure in the air separator and siphoning of the tank.

TECHNICAL CHARACTERISTICS:

- The helicoidal racks of the valve is designed to favour the progressive opening and then regulates flow.
- A filter prevents valve mechanism from impurities.
- This valve makes only few head loss.
- Only design ND 40 (1" 1/2).
- Manufactured in corrosion resistant cadmium steelbronze valve - special hydrocarbon joins.

MOUNTING / MAINTENANCE:

- No other anti-return valve shall be installed on the aspiration pipe.
- The way flow is indicated under the cap by an arrow.
- The antisiphon valve must be installed on the main delivery line from the tank and as close to the distributor pump taking care not to obstruct the air hole of the cap.
- All servicing and maintenance work on the valve can be carried out without disconnected fuel lines by installing shut off valves for any maintenance work.
- A screw adjustment under the valve controls the valve to the flow rate and avoids any knocking phenomenon.
- The internal filter must be regularly cleaned which is on the inlet side of the valve.

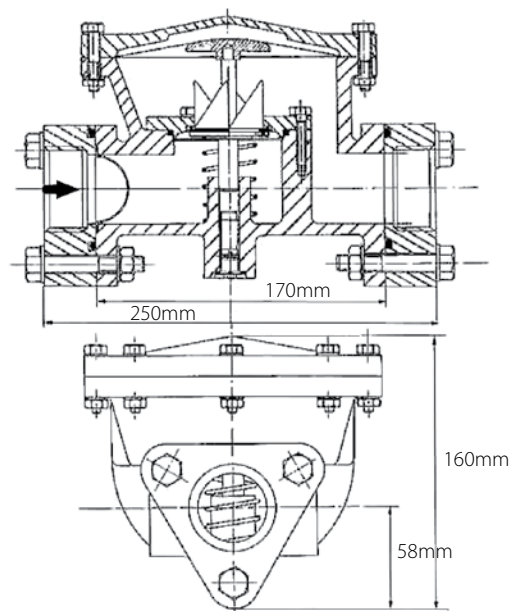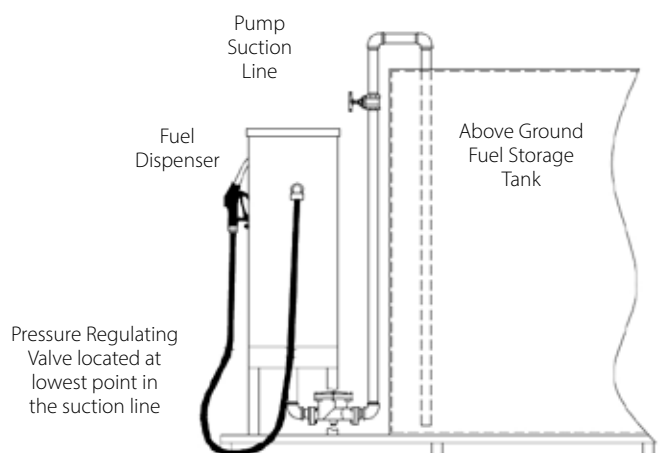

PETRO Contact Information

AFRICA

South Africa

Factory 14 Bentonite Street
Alrode, Alberton, Johannesburg
South Africa
P: +27 (0)11 864 7758
F: +27 (0) 11 864 1649
E: sales@petroindustrial.co.za

UAE

Dubai

Office LB17330, Lobby Building 17
Jebel Ali Free Zone
PO Box 18602
Dubai, United Arab Emirates
P: +971 488 76688
F: +971 488 76932
E: salesuae@petroind.com

AUSTRALIA

Eastern Australia

Factory 2, 106 Potassium Street
PO Box 407
Narangba QLD 4504
P: 07 3204 9558
F: 07 3293 4852
E: sales@petroindustrial.com.au

Western Australia

173 Mulgul Road, Malaga WA 6090 AU
P: +61 (8) 6305 0855
E: saleswa@petroperth.com.au

PETRO INDUSTRIAL



petroind.com