

PETRO INDUSTRIAL



petroind.com



PIUSI

Integrated Dispenser and Electronic Fluids Management System

CUBE 70 MC

Item code: F0059400C-CATA

It's a compact, easy to install diesel dispenser for private use, which ensures fast and precise dispensing by authorised personnel.

It comes standard with a nozzle holder, internal diesel transfer pump, motor and electronic meter, and is capable of recording the date, time and amount of fuel dispensed for the last 200 transactions.

As well as fuel monitoring, it also provides fuel security by only giving authorised users access to the tank's contents.

FEATURES:

- Can be fitted to a wall, directly onto the tank or the optional stand alone pedestal.
- Controls up to 50 or 120 users (depending on model).
- Fuel monitoring features.
- Local memory of 200 transactions.
- 4m x 1" Delivery Hose.
- Available in 12v/24v/230v.
- Pre-selected dispensing.
- Local memory – storing data for the last 200 deliveries.
- Can accept vehicle registration numbers and odometer readings.
- Magnetic key (dallas key) for user identification.
- Records time and date of dispensing.
- Dedicated software for making printouts of dispensing details and individual user summaries.
- Electronic control unit with display and key pad for entering code numbers.
- USB interface to PC.
- Continuous duty cycle.
- Self supporting stamped plate structure , treated against corrosion and paint finished, ready to install
- Self priming vane pump, fitted with bypass valve, mounted on anti vibration supports. Mechanical seal
- Self ventilated enclosed motor (IP 55)
- Suction filter for pump protection.
- Pulse meter with oval gears.
- Automatic nozzle complete with flexible hose and swivel connection.
- Inbuilt nozzle holder provided with pump start / stop switch.
- NOTE Additional Software / Key Kit Required code FMS-F1414400A



PETRO INDUSTRIAL



petroind.com



PRODUCT RANGE:

Code	Description	Voltage			Flow Rate	Meter	H ² O Filter	Pump	Inlet BSP	PC Connect	Users
		AC Volt	Watt	Amp							
F0059400C	Cube 70MC	240	900	4,2	70Lpm	K600	No	Panth.72	50mm (1")	Yes	50


PERFORMANCE:

- Flow rate up to 70Lpm
- Accuracy: +/- 0.5 %.
- Continuous AC operation.
- Noise level below 75 dB.
- IP55 protection.

SHIPPING:

Weight kg	Packaging mm	Product Size mm
25	400L x 400W x 460H	413L x 500W x 341H

ON REQUEST:

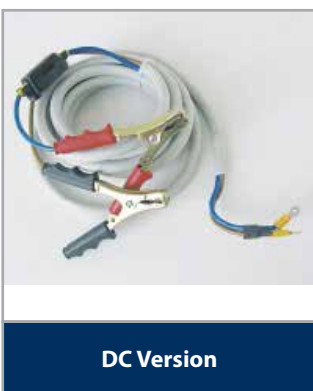

PETRO Contact Information

AFRICA

South Africa

Factory 14 Bentonite Street
Alrode, Alberton, Johannesburg
South Africa
P: +27 (0)11 864 7758
F: +27 (0) 11 864 1649
E: sales@petroindustrial.co.za

UAE

Dubai

Office LB17330, Lobby Building 17
Jebel Ali Free Zone
PO Box 18602
Dubai, United Arab Emirates
P: +971 488 76688
F: +971 488 76932
E: salesuae@petroind.com

AUSTRALIA

Eastern Australia

Factory 2, 106 Potassium Street
PO Box 407
Narangba QLD 4504
P: 07 3204 9558
F: 07 3293 4852
E: sales@petroindustrial.com.au

Western Australia

173 Mulgul Road, Malaga WA 6090 AU
P: +61 (8) 6305 0855
E: saleswa@petroperth.com.au

PETRO INDUSTRIAL



petroind.com