



Lubricants

VISCOMAT VANE PUMP 50LPM 240V AC

Item code: PUMP-F00303M00-CATA

Electric vane pump for pumping fluids of a viscosity up to 500 cSt. Continuous operations, with elevated suction, up to 6 bar pressures.

FEATURES:


- Flow rate: 50Lpm.
- Continuous operation.
- Viscosity up to 500 cSt.
- Noise levels below 70 dB.
- Asynchronous, closed, self-ventilating AC motor.
- Inbuilt adjustable by-pass in pump body.
- Sintered steel rotors with resin vanes.
- Seal on motor shaft accessible from pump side.



Vane rotors



Adjustable bypass valve

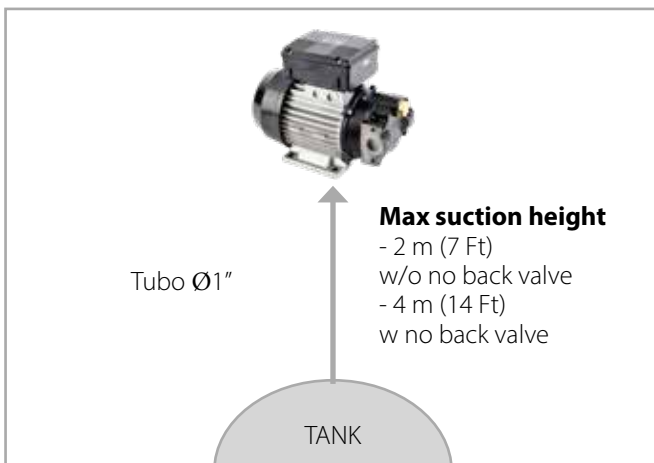

On / Off Switch



Flanged Connection
(On request)



PRODUCT RANGE:

| Code | Description | Flow Rate | | Voltage | | | | rpm | Inlet Outlet BSP | Adjustable Bypass Valve |
|--------------------|--------------------------|-----------|-----|--------------------------|-------------------------|------------|----------|-----------|------------------|-------------------------|
| | | Lpm | Gpm | Single Phase Motor V./Hz | Three Phase Motor V./Hz | Power Watt | Amp max. | | | |
| Viscomat 70 | | | | | | | | | | |
| F0033490A | Viscomat 70 M. 230/50/60 | 25 | 7 | 230/50/60 | - | 1200/1100 | 5,5/5,1 | 1470/1650 | 1" | Yes |
| F0033190A | Viscomat 70 T. 400/50/60 | | | - | 400/50/460/60 | 650/1000 | 2,2/3,1 | 1450/1750 | | |
| Viscomat 90 | | | | | | | | | | |
| F00303M00 | Viscomat 90 M. 230/50/60 | 50 | 13 | 230/50/60 | - | 1350/1600 | 6,2/4,9 | 1400/1600 | 1" | No |
| F00303000 | Viscomat 90 T. 400/50 | | | - | 400/50 | 2000 | 5 | 1450 | | Yes |

Upon request it is available with different voltage and frequency

SHIPPING:

| Weight (kg) | Packaging (mm) |
|-------------|-----------------|
| 14,1 | 355 x 200 x 285 |