

# FT-155 Estancia Wall Fountain

**Three people are recommended for the installation of this fountain!**



## Pump Kit Parts List

PK500 pump (1)  
#10 stopper (1)  
1/2" x 1/2" x 1/2" T connector (1) \*\*  
Approx. 6" length of 1/2" black non-kink tubing (bottom of T connector) \*\*  
Approx. 8" length of 1/2" non-kink tubing (2) \*\*  
Approx. 2" length of 5/8" clear tubing (2) \*\*  
1 1/2" CPVC Pipe (2) \*\*  
Hose clamps (4) \*  
17" length of 3/8" i.d. galvanized steel pipe (2)  
Wedges (2)

\* Hose clamps may be used as flow restrictor  
\*\* Tubing will be preassembled

## FOUNTAIN INFORMATION:

This fountain holds approximately 20 gallons of water.

This fountain uses a medium fountain cover.  
(FTNCOV-MED)

Compatible with Refill #10 Device and LED Kits  
(A different style stopper may be requested for this part.)

## TOOLS REQUIRED:

Bubble Level



## PUMP INFORMATION:

OEMPF525 - 525 GPH Pump  
16 FT cord length

## - W I N T E R   C A R E -

Fountain bowls/tops and other fountain components, which collect water, should not be left outside in the winter since any component, which fills with water and freezes may crack. Likewise, components such as pedestals, which remain in a basin, filled with water, which then freezes, may also crack or crumble. Ideally, therefore, a fountain should always be stored indoors or in a dry protected place such as a covered porch away from the elements. However, if a fountain must be left outside:

- (1) Remove pump, rubber stoppers, drainpipes, finials, and other small components for storage indoors. Note that stoppers or drainpipes are removed to allow drainage in the event water accumulates in any basin.
- (2) Raise fountain base from ground with wood strips so that base will not freeze to the ground surface.
- (3) Cover or wrap the fountain with burlap or other absorbent material (old blanket or towel) and then cover securely with plastic, making sure that water will not accumulate in the basin or other fountain component and freeze;
- (4) Check fountain periodically to insure that plastic is secure and water is not accumulating in any fountain component.

## - G E N E R A L   F O U N T A I N   T I P S -

**Install fountains on a level surface.** You will need a properly grounded 110-volt (AC only) GFCI protected receptacle near the fountain for your pump. All pumps are submersible and must be completely underwater to function properly. Test all pumps and adjust to full output prior to assembly. It is not recommended that fountains be placed directly on grass or dirt. Position the channel opening at the base of each fountain toward the electrical outlet to be used since the pump cord will be threaded through this opening.

Check out YouTube for a "How to" video.

For more Campania product information visit [www.campaniainternational.com](http://www.campaniainternational.com)

All of our cast stone is proudly




Made in USA


# FT-155 Estancia Wall Fountain

**Three people are recommended for the installation of this fountain!**


Assemble your fountain on a level surface capable of holding a minimum of 1065 pounds with an approximate 8 square foot footprint.

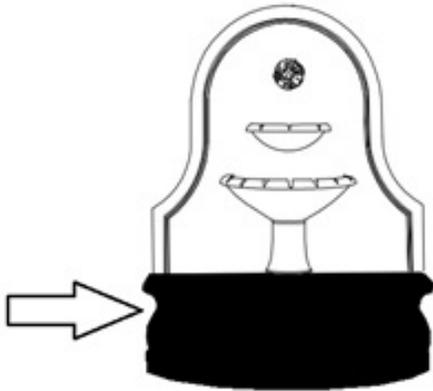

FT-155C (507 lbs)  
46"L x 26.25"W x 15.25"H

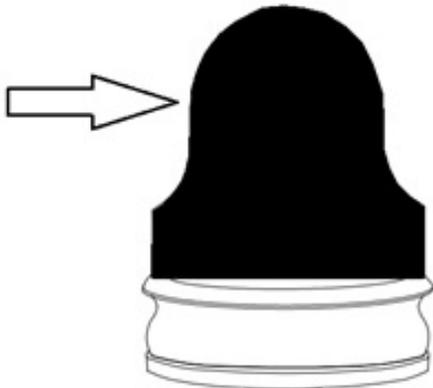

FT-155A (359 lbs)  
43.5"L x 13.5"W x 43"H

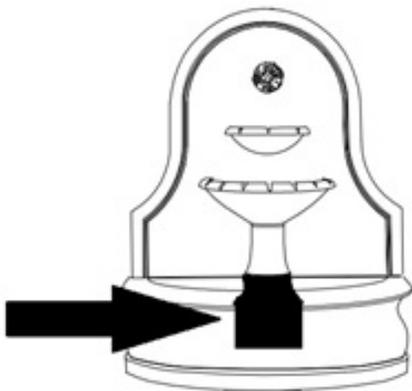

FT-155B (32 lbs)  
13.5"L x 6.25"W x 12"H

1. Assemble the pump and tubing
  - a. Place a hose clamp over the 1/2" non-kink tubing without the clear tubing at the bottom of the T-connector.
  - b. **NOTE: All pumps come with 1 adapter already inserted into the pump and 2 adapters secured to the power cord.**
    - i. **This fountain uses the medium adapter provided.**
  - c. Secure the tubing to the pump by tightening the hose clamp.
  - d. Place the stopper around the pump cord approximately 6" from the pump.
2. Feed the pump cord through the hole and channel in the basin (FT-155C).
3. **FIRMLY** press the stopper into the hole evenly.
  - a. Note: Using the handle of a screwdriver or hammer works best to press the stopper in place.
4. Place the galvanized pipes into the holes at the top 2 back corners of the basin.
5. Carefully lift the water feature (FT-155A) and place it down onto the basin so that the galvanized pipe goes into the holes at the bottom of the water feature.
6. Insert the two CPVC pipes that are already on the preassembled tubing into the two CPVC couplings at the bottom of the water feature.
7. Place the pump cover (FT-155B) into position.
8. Fill the basin.