



Thank you for purchasing your Ashdown Engineering Amplifier. If you live in the UK, please register your purchase by completing this form and return it to the following address:

Ashdown Engineering, The Stables, Stevens Farm, Mashbury Road, Chignal St James, Chelmsford, Essex CM1 4TX, England

(Alternatively you can register online at <http://www.ashdownmusic.com>)

If you live outside the UK, the local Ashdown distributor may have included a specific registration form for your country.

**Your Ashdown Engineering product details:**

Model .....  
Colour .....  
Voltage .....  
Tested by .....  
Serial number .....  
Date .....

**1 YEAR WARRANTY**

Your Ashdown Engineering amplifier has been manufactured to the highest standards, using the best-selected materials. To ensure its optimum performance, please ensure your amplifier is regularly serviced. This product carries a one year warranty, against defects in materials and workmanship, for the original purchaser. Ashdown Engineering will, at their discretion, replace or repair any product or part thereof, which is found by Ashdown Engineering to be defective. This warranty shall not apply to the damage of covering, fittings or finishes when affected by carelessness, accident or extreme climate changes. Nor does it apply to normal wear and tear of parts such as valves, fuses, light bulbs, speakers, controls etc.

Please complete the lower section of this warranty and return it within 10 days of purchase to Ashdown Engineering Ltd. at the above address. In the unlikely event of any defect, please contact an authorised Ashdown Engineering dealer. All transport charges are to be pre-paid by the Owner. Unless the registration card is returned normal country warranty laws apply.

**IMPORTANT - REGISTRATION CARD**

Please complete and return this warranty within 10 days of purchase. Include any comments if possible.

Name ..... Purchased from .....  
Address ..... Date .....  
..... Model .....  
..... Serial Number .....  
.....  
Email .....  
Age .....  
Comments .....  
.....  
.....  
.....



[www.ashdownmusic.com](http://www.ashdownmusic.com)



# OPERATING INSTRUCTIONS




## **OPERATING INSTRUCTIONS**

TourBus 10 and TourBus 15




# Front Panel Facilities

## TOURBUS 10

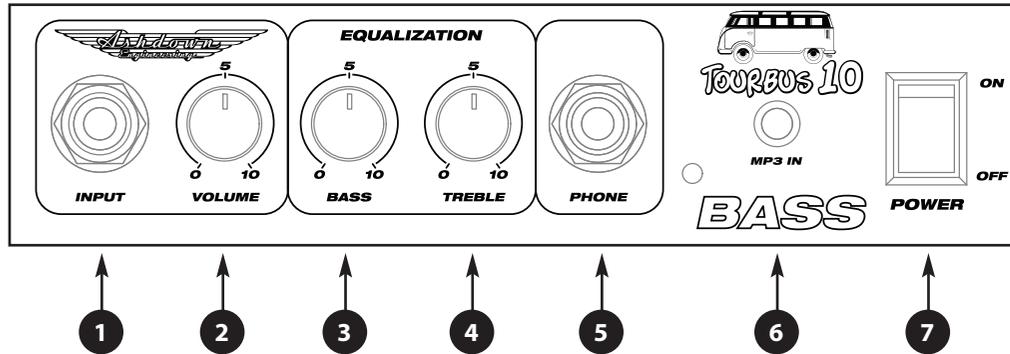


## TOURBUS 15

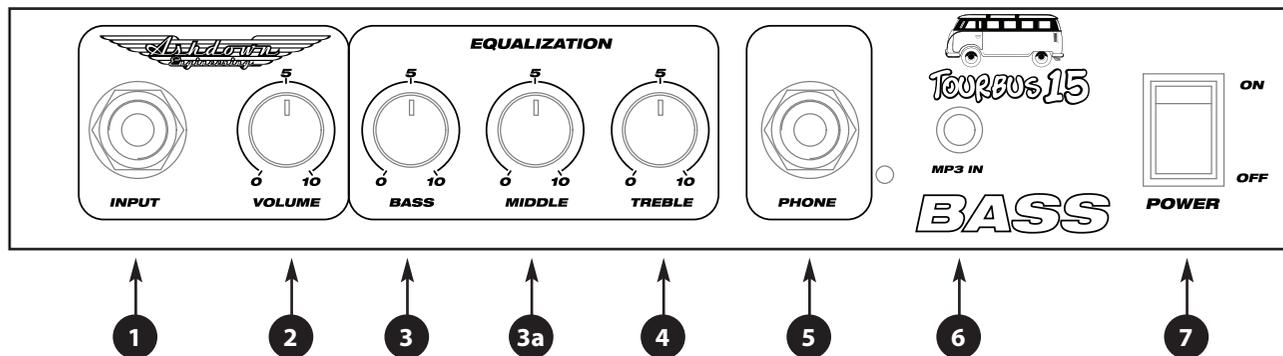


- 1 Input Jack**  
 Plug in your bass guitar here using a standard guitar cable with a 1/4 inch jack.
- 2 Master Volume Control**  
 Use this control to adjust the overall output of the amplifier. Make sure you turn this control fully to zero before turning the amplifier on.
- 3 Bass Control**  
 Use this control to adjust the amount of low frequencies (bass) applied to the signal.
- 3a Middle Control**  
 This control adjusts the amount of mid-range frequencies applied to the signal.
- 4 Treble Control**  
 Use this control to adjust the amount of high frequencies (treble) applied to the signal.
- 5 Headphone Jack**  
 This 1/4 inch jack socket can be used to plug in stereo headphones for silent rehearsal. Plugging headphones in automatically mutes the speaker. This socket can also be used as a direct recording output, and in situations where you want to mute the speaker while recording.
- 6 MP3 INPUT**  
 Use this 3mm mini jack to plug in an external MP3 player so that you can play along with songs.
- 7 On/Off Switch**  
 Use this switch to turn the amplifier on and off. The amplifier is on when the LED is illuminated.

# Rear Panel Facilities

## TOURBUS 10

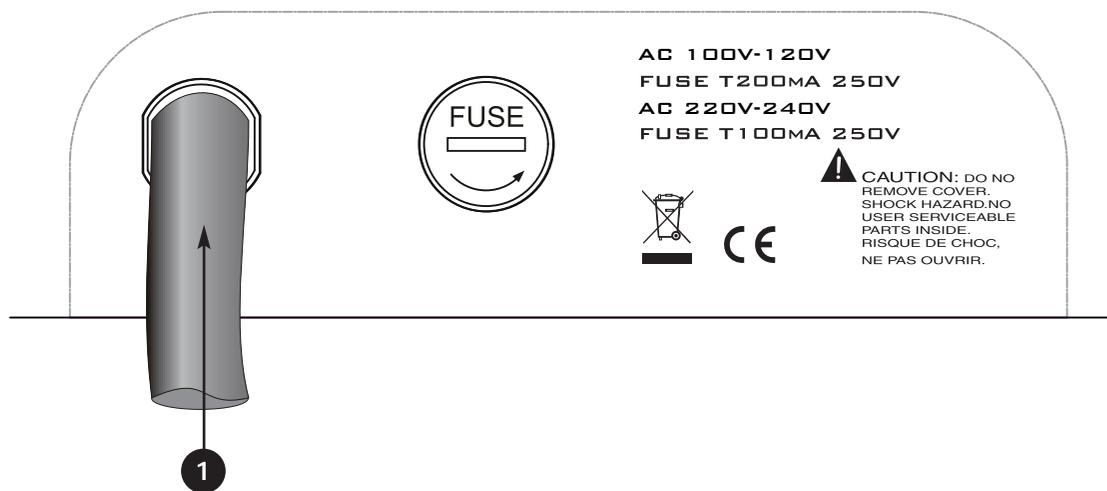

## TOURBUS 15

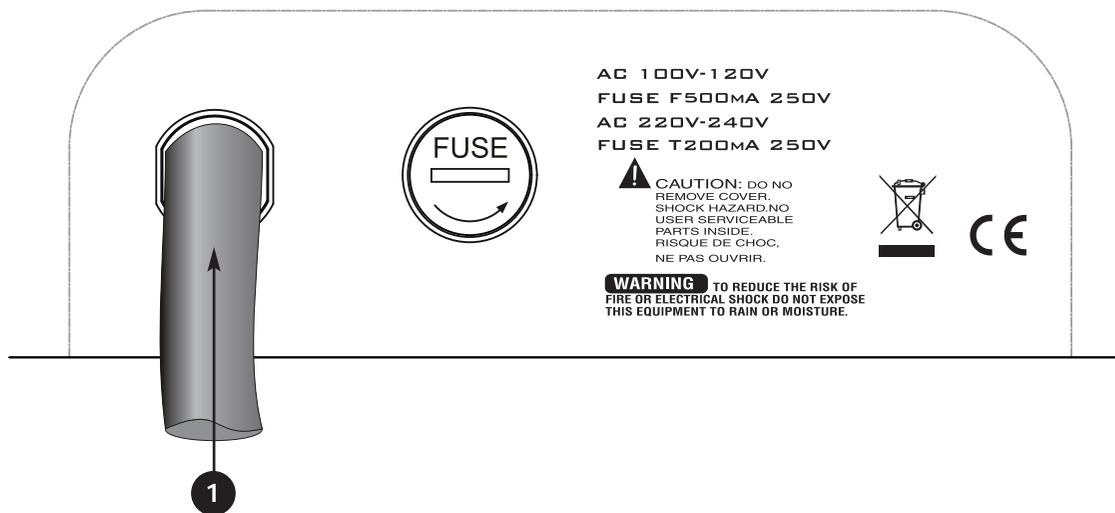

1

### Power Cable Connection

Plug in the included power cable here to connect the amplifier to a standard mains wall outlet.

# Specifications

## TOURBUS 10

<b>OUTPUT</b>	10 Watts
<b>SPEAKER</b>	Custom 6.5 inch / 4Ω
<b>WEIGHT</b>	8.8 lbs / 4 kg
<b>BOX DIMENSIONS</b>	9.3 inches x 10.8 inches x 7.5 inches (235mm x 275mm x 190mm)
<b>INPUT IMPEDANCE</b>	1MΩ
<b>HEADPHONE IMPEDANCE</b>	32Ω or greater (600Ω for best results)
<b>CD/MP3 INPUT</b>	Yes

## TOURBUS 15

<b>OUTPUT</b>	15 Watts
<b>SPEAKER</b>	Custom 8 inch / 8Ω
<b>WEIGHT</b>	16.15 lbs / 7.35 kg
<b>BOX DIMENSIONS</b>	13.75 inches x 11 inches x 14.5 inches (348mm x 276mm x 365mm)
<b>INPUT IMPEDANCE</b>	1MΩ
<b>HEADPHONE IMPEDANCE</b>	32Ω or greater (600Ω for best results)
<b>CD/MP3 INPUT</b>	Yes