



LUCAS STYLE LICENSE & TAILLIGHT BRACKET INSTRUCTIONS

PART NO. 09-570 & 09-577

For technical support contact Joker Machine

2245 Kiowa Blvd N. Ste. 100, Lake Havasu City, AZ 86403

PHONE: 909-596-9690, FAX: 909-596-9693


sales@jokermachine.com, www.jokermachine.com

TOOLS NEEDED

- Phillips-Head Screwdriver
- M4 Allen Screwdriver/T-handle
- 10mm Socket
- 1/4" Drill

1. Remove taillight from license & taillight bracket.
2. Rotate license & taillight assembly to desired position along the fender.
3. Drill 1/4" (6.3mm) holes in fender after locating correct spots for bracket and taillight wiring.
4. Re-install taillight and connect wiring.

L.E.D. WIRING DIAGRAM

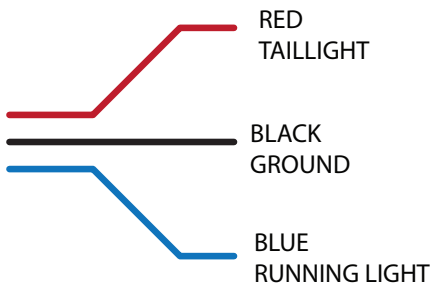

FENDER MOUNTING HOLES

