

# Installation Instructions/Roof Panel Storage System™

The Roof Panel Storage System is designed to securely store the Jeep JK's front roof panels in the trunk area. The System uses a small percentage of the trunk space allowing room for additional cargo. Take the front of your top off anytime and have safe, secure storage using foam supports and separators and special straps.

Item Description	Quantity	Part No.
Foam floor supports	2	1
Foam top Separators	2	2
Straps with clips	2	3
Spring clip with cord	1	4
Instructions	1	5

For installation questions, warranty service, missing parts, call:  
Toll free 866 284 7428

**Tools required for installation:** None

### Assembly

Begin by placing the Foam Floor Supports (1) as shown in figure one. Next attach the Straps (3) as shown in figure one. Attach the Spring Clip with cord as shown in figure two.

### How to Use the Roof Panel System

Remove the driver's side roof panel from the top and set in the Foam Floor Supports as shown in figure two. Attach the Spring Clip to hold the roof panel in place while you retrieve the second roof panel.


Set the second panel in place and insert the Foam Separators as shown in figure three. Clip the straps as shown: *Hint, before removing the first panel, position the top straps over the head rests and position the bottom straps so both are ready to connect together before the roof panels are placed in the Foam Supports. This makes it easier to secure the panels without hunting for the straps.*

### Warranty

This product is warranted for 90 days from date of purchase.


Short end of straps connect to the inside headrest bracket. Attach the long end to the child seat belt anchor.

Fig. 1

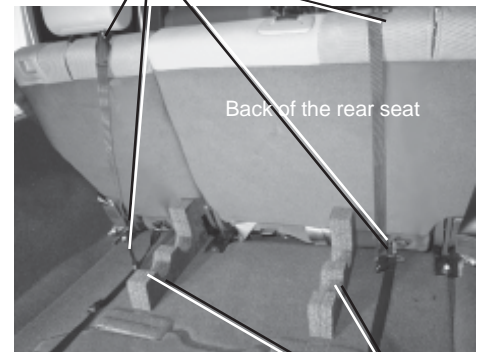

Place Foam Floor Supports as shown against the seat back.


Fig. 2

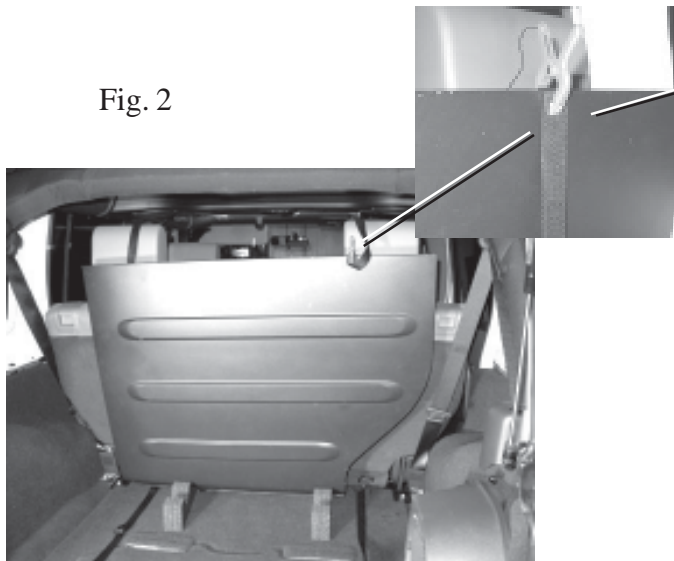

Tie the Clip's elastic strap to the strap close to the head rest so it doesn't get lost. Loop the nylon strap over the edge of the top and use the clip as shown, thus holding the 1st top section.

Get the second roof panel (passenger) and install as shown then, hook the straps together to secure panels. Insert the two Foam Forks as shown then tighten the two straps securely by pulling the straps tight in the clip.

Fig. 3

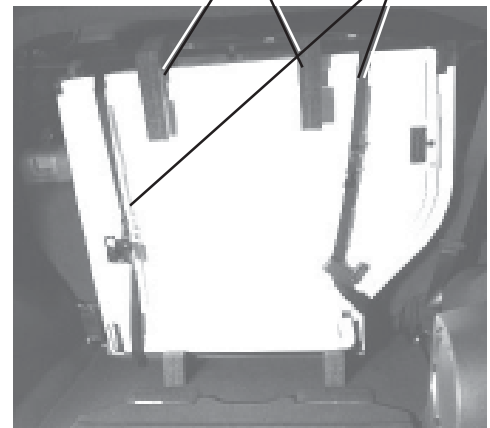

Position the first roof panel (driver's side) in the back notch of the foam floor support as shown and clip.

3651 South 700 East  
Salt Lake City, Utah 84106  
Phone - 801•262•7322  
FAX - 801•262•5087  
www.langeoriginals.com

