




## Coyote Mirror JL Passenger/Driver Side Mirror Instructions

Includes Part Numbers:

Tools needed: T-40 torques head ratchet driver included in glove-box kit (for removal of Jeep panel bolts)

### STEP 1: Identify Parts

If parts are missing please call the Lange Originals factory toll-free-866-284-7428. Or go to the contact page at [www.langeoriginals.com](http://www.langeoriginals.com), and send us an e-mail. In your correspondence please include the description of the missing part, your name, shipping address, phone number, who you ordered the part from, and e-mail address. Colors and style may vary.

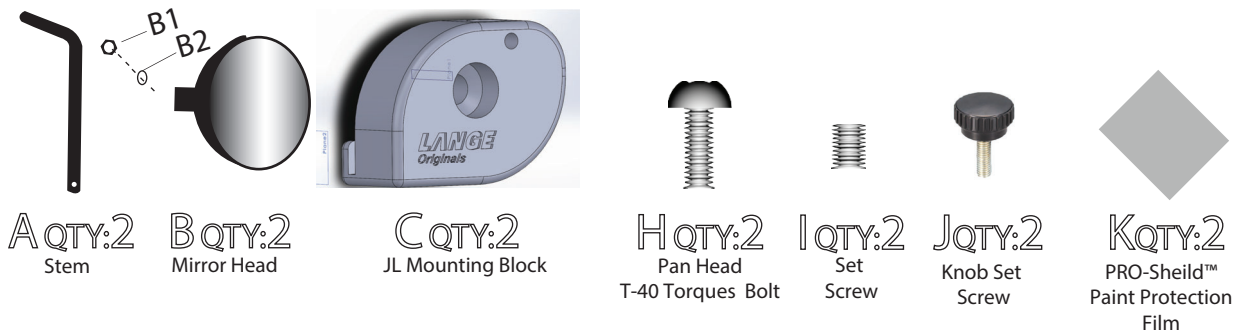

### STEP 2: Preparations

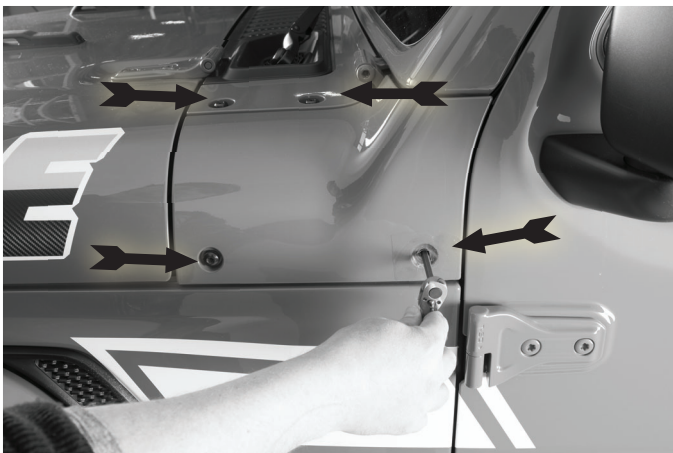


Fig 2  
Remove the 4 T-40 torques head bolts from this body panel on the Jeep and remove body panel



Fig 3  
Test fit the mirror block (see fig 4 for placement) and apply 3M™ Laminant paint protection (k1) to the face of the Jeep body panel where the block will touch, and cut a hole for the bolt in the center with a sharp blade.

### STEP 3: Mounting the block



**Fig 4**  
Slide the block on the body panel with the rounded side facing the door. And replace panel with the mirror block sleeved into the panel.



**Fig 5**  
Replace the OEM torques head screw with the longer ones provided in your mirror kit and tighten until snug. DO NOT OVER-TIGHTEN. Over-tightening can damage your paint Replace OEM screws in the three remaining holes.

### STEP 4: Installing the stem



**Fig 6**  
After the mirror block is firmly attached slide the stem into the upward facing hole. This drilled hole has tight tolerances to reduce any vibration, and will be a tight fit. It might require turning the stem back and forth.



**Fig 7 Shown with Knob**



**Fig 8 Shown with set screw**

Select the set screw to hold the stem in place. There are two types: The knob set screw (J) is for ease with quick release. The small flush set screw (I) is more flush but requires an Allen key for removal (not provided).

## STEP 5: Attaching the mirror head



Fig 10

Place the threads of the mirror head through the hole in the mirror stem. Replace the lock washer, and then replace the nut until it is snug. Set mirror position and then adjust the screws on the back of the mirror to increase or decrease maneuverability of mirror head

# Lange Originals Limited Warranty

## What the Warranty Covers:

This warranty covers defects from the manufacturing process that would render the product unusable. It also covers items missing from the packaging unless the damage or loss is the result of mishandling by the shipper. This warranty supersedes all other product warranties in the instructions page.

## Who is Covered?

This warranty covers the original purchaser of this device with an invoice of purchase or receipt from a valid current dealer.

## How Long Does the Coverage Last?

This warranty remains in force for one year, to the original purchaser, from the date of purchase on the invoice or receipt. This warranty applies only to approved dealers of Lange's products.

## What We Will do to Correct the Problem:

Lange Originals will repair or replace, at their discretion parts or the whole. Warranty does not cover 3<sup>rd</sup> party labor, or return shipping.

## How do I Get Service?

To obtain warranty repairs, you must obtain authorization from Lange Originals for either a return, or replacement part. If you wish to make other arrangements for repairs/replacement, notify us on our form via our website [langeoriginals.com](http://langeoriginals.com) and click on the warranty tab. We will respond in writing on how to proceed. Please do not contact your dealer, contact Lange Originals directly to avoid delays. Please note you will be asked to provide information such as dealer receipt/invoice and sometimes pictures of the item. Return shipping is not covered. We will ship any repaired or replacement items at no cost.

## Normal Responsibilities of the Buyer:

Buyer is responsible for the inspection and tightening of bolts, nuts, screws, lag screws, gears, pulleys, casters, u-clamps, hooks and any other parts that require regular attention. Lubricating of some parts is necessary such as the crank type worm gear, on crank type lifting units.

## This Warranty Does Not Cover:

1. Any defect caused by abuse, misuse, neglect, carelessness, or accident.
2. Loss of time, loss of use, towing charges, bus fare, car rentals, labor costs of installers, or other incidental damages of property.
3. Damage as a result of not properly following directions, or common safety practices with tools, ladders, and other instruments or tools during installation.
4. Deterioration from wear or exposure.
5. Any defect caused by alteration or modification of the home/garage.
6. Any defect which would not have occurred if instructions in the instruct manual had been followed.
7. Failure of an Chrysler product due to lack of understanding. For example if a buyer does not correctly unfasten electrical cables
8. All disputes concerning this warranty would take place in Utah courts and under Utah law.
9. Shipping damage is covered under our customer satisfaction 30 day return policy, but is not covered after this period of time.
10. Minor cosmetic issues such as paint flaws, mis-shaped foam pieces that do not affect the function of the product as determined by Lange.

Lange Originals LLC reserves the right to change this document at any time and is not limited to the terms and conditions described here. For a comprehensive warranty on your specific part number/product please visit us at [www.langeoriginals.com](http://www.langeoriginals.com) and click on the warranties page.