


AL 10/1

Compact, highly-efficient and weather-proof sound column for use indoors and out. Ideal for the reproduction of speech and background music, e.g. in amusement parks, outdoor installations, warehouses, production sites, info columns, ... The speaker, featuring two 87mm full-range chassis with polypropylene cone creates a light vertical focussing. Assembly is achieved by the U-type bracket included in the delivery. Cable entry is via an M12 screw connection.

The AL 10/1 is also available as a seawater-resistant version.

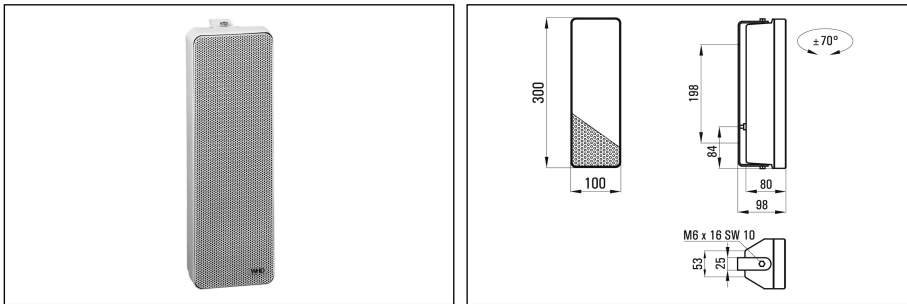

| Technical Data | AL 10/1-T12 | AL 10/1-4 |
|---|---|---|
| Load Rating / Music Power | 12 W | 12/15 W |
| Impedance | | 4 Ohm |
| Transformer | 12/6/3/1.5 W | |
| SPL 1W/1m | 94 dB | 94 dB |
| SPL PNenn/1m | 105 dB | 105 dB |
| SPL PNenn/1m/f | 110 dB/8 kHz | 110 dB/8 kHz |
| Frequency Range (-3 dB) | 220-16000 Hz | 220-16000 Hz |
| Frequency Range (-10 dB) | 170-18000 Hz | 170-18000 Hz |
| Transmission Angle, horizontale 1/2/4/8 kHz (-6 dB) | 220/-/60/60 ° | 220/-/60/60 ° |
| Transmission Angle, verticale 1/2/4/8 kHz (-6 dB) | 140/-/100/30 ° | 140/-/100/30 ° |
| Material | Housing: plastic, grille: aluminium | Housing: plastic, grille: aluminium |
| Net Weight | 2 kg | 1.6 kg |
| Colors | white (RAL 9016), black (RAL 9005) | white (RAL 9016), black (RAL 9005) |
| Accessories | incl. u-type bracket, as an option MB 1/2: mast attachment (70-210mm) | incl. u-type bracket, as an option MB 1/2: mast attachment (70-210mm) |