


AMP 550

The 5-Zonen amplifier comes with an output of 5 x 50 W. The AMP 550 is versatile applicable e.g. in restaurants, wellness ranges, shops,... It is suitable both for the connection of 100 V and of 8 Ohm loudspeakers. The AMP 550 offers the option of choosing 1 of 7 sources per zone: microphone 1, microphone 2/Aux 1, Aux 2-Aux 6. So in each zone one of the seven chosen source can be heard independently by the other zones.

It is further adjustable per zone whether the microphone 1 is to have priority or not; If someone speaks into this microphone, then all other sources of the zones with activated priority are muted and the announcement from microphone 1 is reproduced.

The AMP 550 can be used as desktop device or can be mounted in 19" - Rack (2 HE). It is designed for continuous use with tensions of 115V or 230V (switchable).

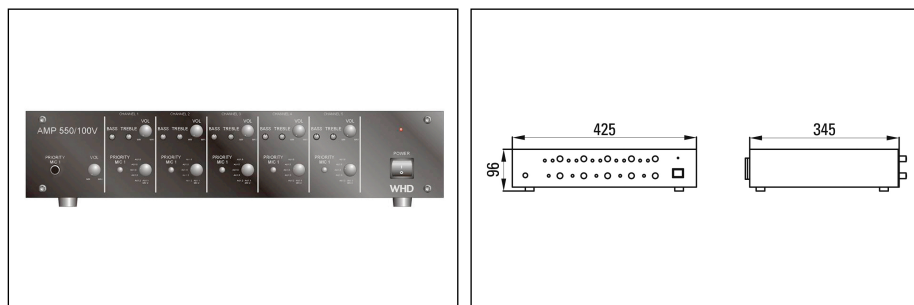

Technical Data	AMP 550
Audio Input	2x microphone, 1 of them switchable to Line-In, 5x Line-In
Audio Output	5 zones (optional 8 ohms, 70V or 100V)
Other Interfaces	Mute input for quiet wiring
Operating Voltage	115V AC / 230V AC
Material	Housing: metal
Accessories	Microphone desk MIC 100, Audio Source IR 19