


TL 5

Compact horn speaker, ideal for loudspeaker- and alarm systems indoors and out, e.g. in production spaces, underground car parks, etc ... Unlike normal horn speakers this model is fitted with a 66 mm cone type full-range loudspeaker rather than a driver. This produces a larger bandwidth, which makes loudspeaker voices sound very authentic. Assembly is via a U-type bracket. It can also be mounted on a stand using an MB 1/2 optional mast attachment. Cable entry is via an M12 screw connection. Cable entry is via an M12 screw connection.

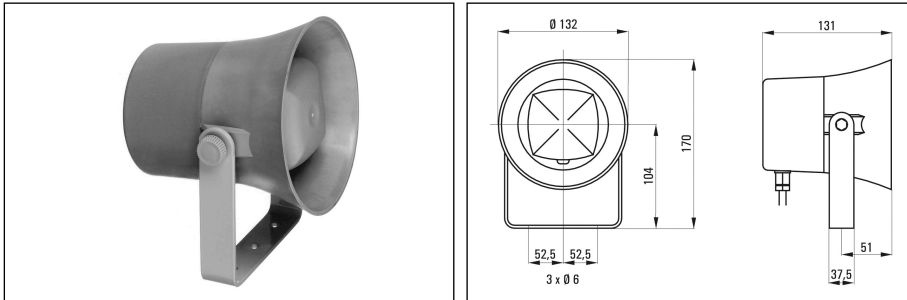

Technical Data	TL 5-4	TL 5-T6
Load Rating / Music Power	6/8 W	6 W
Impedance	4 Ohm	
Transformer		6/3/1.5 W
SPL 1W/1m	97 dB	97 dB
SPL PNenn/1m	105 dB	105 dB
SPL PNenn/1m/f	109 dB/3 kHz	109 dB/3 kHz
Frequency Range (-3 dB)	400-13000 Hz	400-13000 Hz
Frequency Range (-10 dB)	350-14000 Hz	350-14000 Hz
Transmission Angle 1/2/4/8 kHz (-6 dB)	360/-/60/50 °	360/-/60/50 °
Component Set	1 x B 66 BB	1 x B 66 BB
Material	Housing: plastic, u-type bracket: aluminium	Housing: plastic, u-type bracket: aluminium
Net Weight	0.4 kg	0.7 kg
Colors	grey (RAL 7037)	grey (RAL 7037)
Accessories	MB 1/2: mast attachment for mast diameter 70-210 mm	MB 1/2: mast attachment for mast diameter 70-210 mm