


Foreword

Thanks for purchasing roof rack. It will bring more convenience for your travel.
 This guide will show info about installation,notice etc. If you have any question or suggestion.
 Please don't hesitate to contact us.

The load-bearing capacity of this product is 150kg-200kg. The actual load-bearing capacity depends on whether the rail and roof you bought can bear this weight, so it is applicable according to the actual situation.

(Note: Please read the instruction carefully before installation and check whether all parts meet the requirements of the list. The parts list is 1.4 meters and 1.6 meters, if you are 1.8 size, the actual parts will be more than the number on this list.

Parts List roof rack:

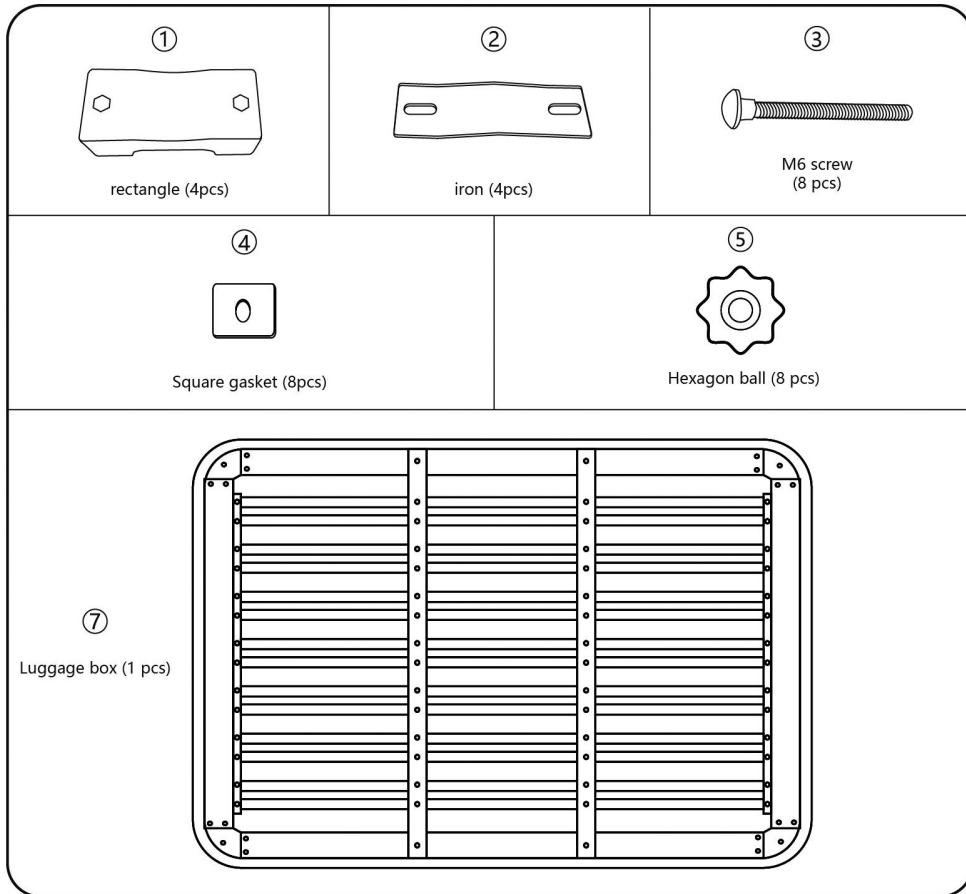

1. Press the accessories 3 and 4 into the operation in Figure 1.




Figure 1

2. Put the finished accessories in Figure 1 into the chute on the back of the luggage frame and decide where to put them according to your own situation.

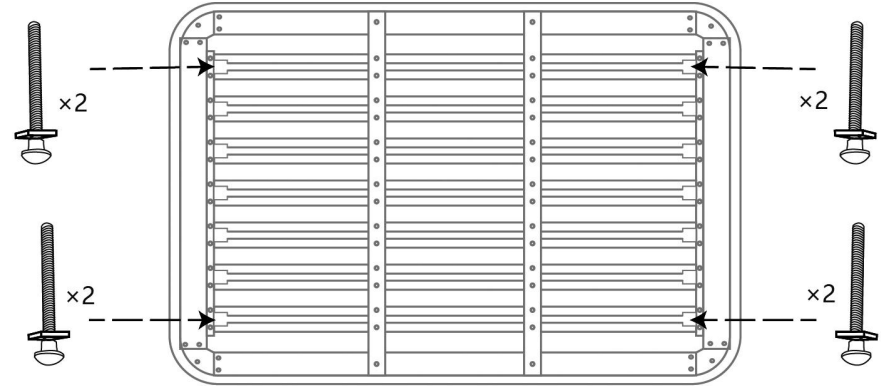


Figure 2

3. Place fitting 1 into the screw shown in Figure 3, as shown in Figure 4. Place your luggage rack bar in the middle of accessory 1, as shown in Figure 5. Secure with

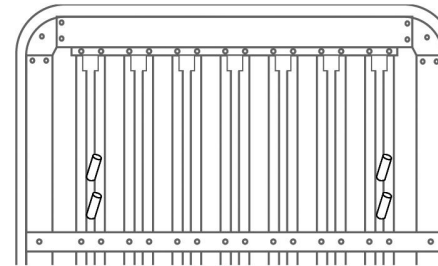


Figure 3

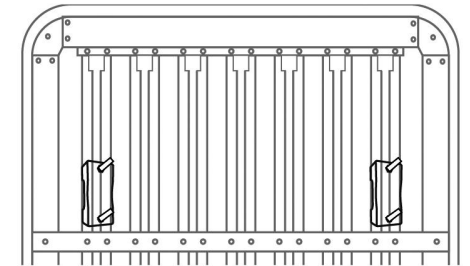


Figure 3

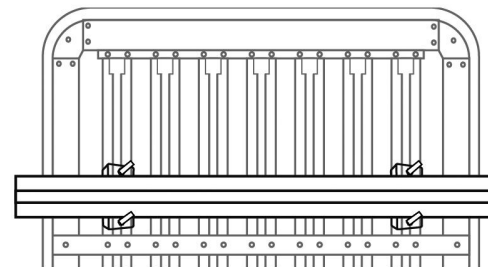


Figure 5


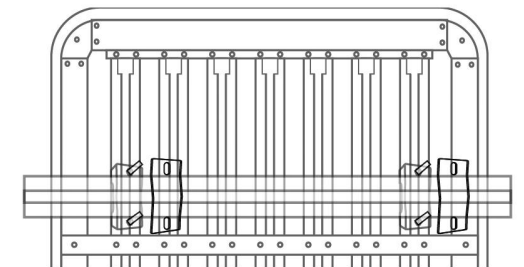


Figure 6

Car luggage frame

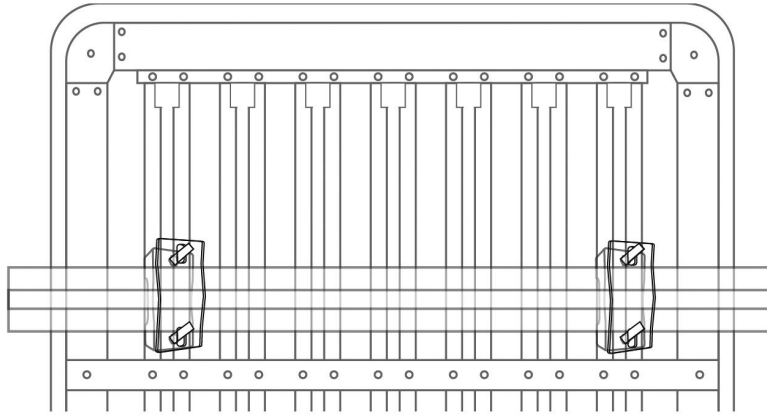

4. Then fix it with accessories 5 and the installation is completed.


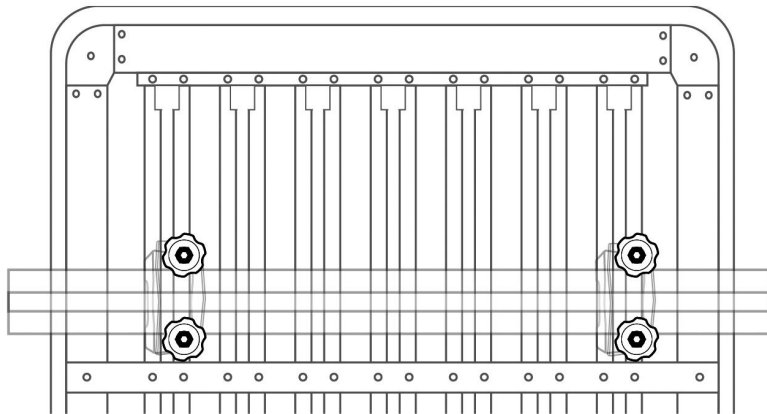


Figure 7

