


# Jockey Box System with Sodastream

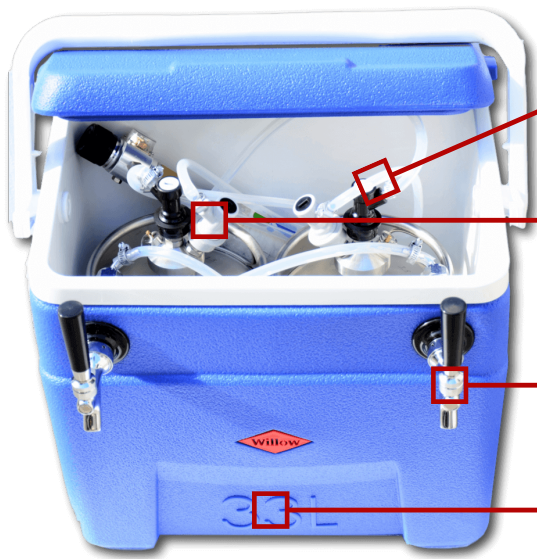

Black Liquid Connection  
(upright, centre post)

Grey Gas  
Connection (Offset post)

Tap

33L Willow Esky

Regulator Pressure  
Adjustment

Sodastream Adapter



These two parts included  
allow you to use one of the keg itself out of the box



t split gas line feeds both  
kegs same time

## To Assemble

1. Attach the taps to the shanks on the front of Esky.
  2. Ensure regulator is turned off (anti-clockwise).
  3. Screw the sodastream adapter firmly into the regulator base, then screw the sodastream gas bottle firmly into it.
- Note: You can also use 16g gas bulbs, if so screw in till you meet resistance then give a firm twist to pierce and seal the bulb.
5. Cut clear hose to height of keg and attach to the base of the spear (steel part with 2 posts and a ring pull valve on it).
  6. Fill the kegs with beer/cider/soft drink and then screw in the spear.
  7. Attach the gas line to the keg spear and turn the gas on while holding the ring pull valve open for 3 seconds to flush out any air.
  8. Attach the liquid connection to the keg spear (black adapter that is joined to taps).
  9. Kit includes the black disconnect and tap shank adapter + grey disconnect and swivel adapter, these 2 parts will allow you to use one of the keg out of the box itself,

## To Use

We recommend using water first to test for leaks before filling it with liquid.

1. With standard tap, set the pressure to zero (anti-clockwise) and then open tap over a glass. Turn up pressure slowly till you have a good pour.
2. You can then leave the pressure set to this level till end of session but turn up to 10psi to store or liquid will go flat.
3. With flow control taps leave at 10psi and adjust flow of tap using the lever on the side of it.
4. To disconnect the kegs you must make sure the pressure inside them is **BELOW 10psi!**