

# Cube RL-CUBE-60-BK

Recessed Light

Product Finishes: ■



## Specifications:

**Voltage:** 12V AC

**Wattage:** 1.5

**Volt Amps:** 2.5

**Lumens:** 11

**Color Temp:** 2700k

**IP Rating:** 67

**CRI:** 93

**Light Source:** Integrated

**Material:** Polycarbonate

**Cable Length:** 36"

**Lux (lx):** 1.4 lx

**Candelas (cd):** 5.4 cd

**Rated Life:** 50,000 hours

**Warranty:** 7-year comprehensive

**Dimmable:** No


**Color-Changing:** No

## Product Uses:


Decks, Pathways, Pavers,  
Stairs, Risers, Concrete

## Accessories:

Fang

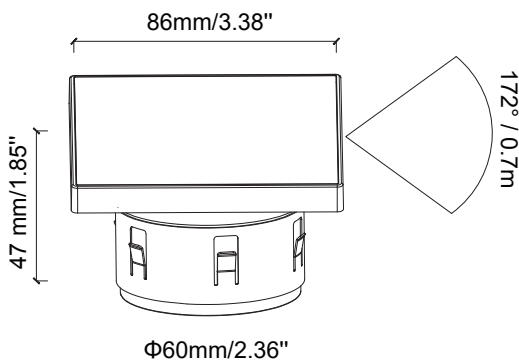

Max. Luminous intensity : 5.4 cd

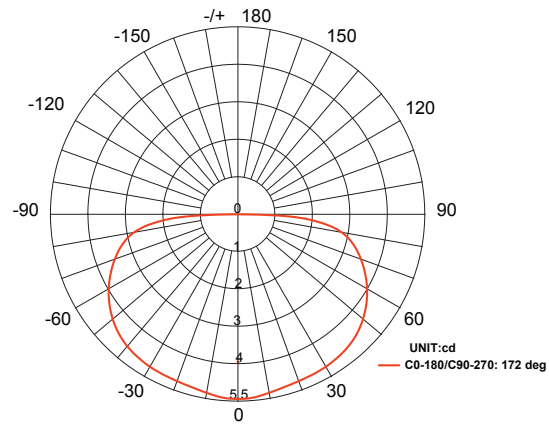

**AVERAGE BEAM ANGLE 90/270 (50%): 172 DEG**  
**AVERAGE BEAM ANGLE 0/180 (50%): 172 DEG**

DISTANCE (FT)	CENTER BEAM (FC) Eavg/Emax	ILLUMINANCE - CONE OF LIGHT	BEAM DIAMETER (FT)
1	2.10/61.18		0.32
1.5	0.39/7.34		0.60
3	0.10/1.84		1.17
5	0.05/1.02		1.83
6.5	0.03/0.50		2.54

**AVERAGE BEAM ANGLE 90/270 (50%): 178 DEG**  
**AVERAGE BEAM ANGLE 0/180 (50%): 177 DEG**

