

Onyx Square RL-ONYX-SQ-60-BK

Recessed Light

Product Finishes: ■ ■




Specifications:

Voltage: 12V AC
Wattage: 3
Volt Amps: 4.5
Lumens: 200
Color Temp: 2700k
IP Rating: 67
CRI: 92.5
Light Source: Integrated


Material: Polycarbonate
Ring Material: Anodized aluminum
Cable Length: 36"
Lux (lx): 5.1 lx
Candelas (cd): 191 cd
Rated Life: 50,000 hours
Warranty: 7-year comprehensive
Dimmable: No
Color-Changing: No

Product Uses:
 Pavers, Concrete, Walls,
 Fences, Retaining Walls

Accessories:
 Fang

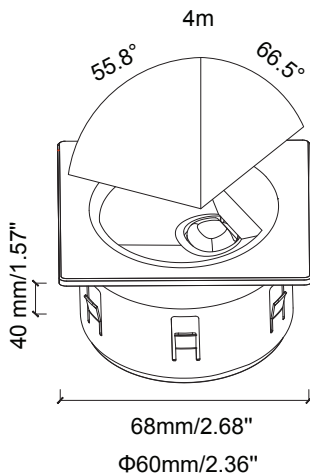

Max. Luminous intensity : 191 cd

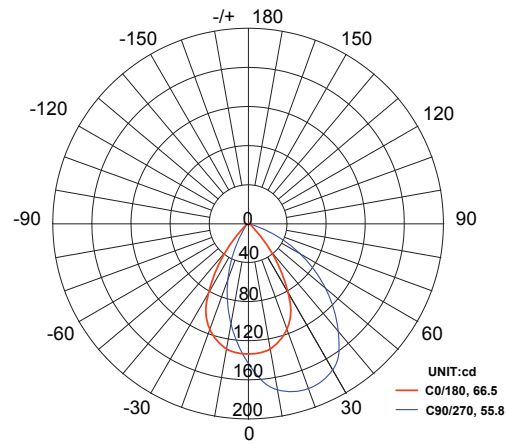

AVERAGE BEAM ANGLE (50%): 61.1 DEG

DISTANCE (FT)	CENTER BEAM (FC) Eavg/Emax	ILLUMINANCE - CONE OF LIGHT	BEAM DIAMETER (FT)
3.25	7.70/14.65		3.48
6.25	1.92/3.66		6.96
10	0.88/1.67		10.70
13	0.48/0.91		13.91
16.5	0.31/0.59		17.62
20	0.22/0.42		21.40

