

# Prism Mini RL-PRISM-22-BK

Recessed Light

Product Finishes: ■



## Specifications:

**Voltage:** 12V AC

**Wattage:** 0.5

**Volt Amps:** 0.8

**Lumens:** 3

**Color Temp:** 2700k

**IP Rating:** 67

**CRI:** 93

**Light Source:** Integrated

**Material:** Polycarbonate

**Cable Length:** 36"

**Lux (lx):** 0.4 lx

**Candelas (cd):** 1.43 cd

**Rated Life:** 50,000 hours

**Warranty:** 7-year comprehensive

**Dimmable:** No


**Color-Changing:** No

## Product Uses:


Decks, Pathways, Pavers,  
Stairs, Risers, Concrete

## Accessories:

Fang Mini

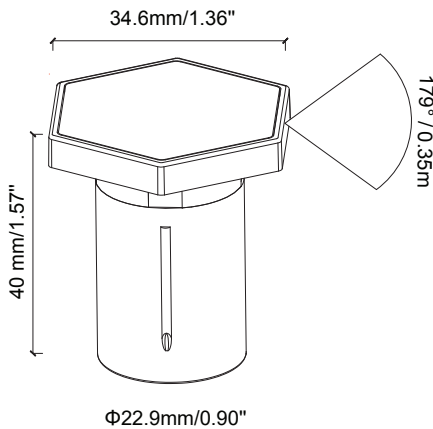

Max. Luminous intensity : 1.43 cd

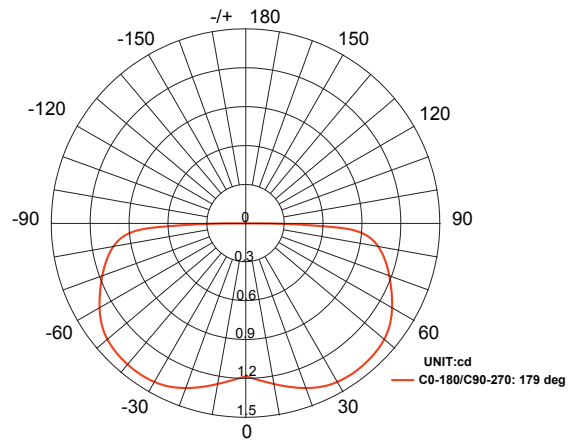

**AVERAGE BEAM ANGLE 90/270 (50%): 179 DEG**  
**AVERAGE BEAM ANGLE 0/180 (50%): 179 DEG**

DISTANCE (FT)	CENTER BEAM (FC) Eavg/Emax	ILLUMINANCE - CONE OF LIGHT	BEAM DIAMETER (FT)
1	0.193/14.16		0.84
1.5	0.23/1.69		1.58
3	0.012/0.86		2.21
5	0.006/0.47		3.50
6.5	0.002/0.11		6.83

**AVERAGE BEAM ANGLE 90/270 (50%): 179 DEG**  
**AVERAGE BEAM ANGLE 0/180 (50%): 179 DEG**

