

Ray RL-RAY-60-SS

Recessed Light

Product Finishes: ■ ■





Specifications:

Voltage: 12V AC
Wattage: 1.5
Volt Amps: 2.5
Lumens: 100
Color Temp: 2700k
IP Rating: 67
CRI: 93
Light Source: Integrated

Material: Polycarbonate
Ring Material: Stainless steel
Cable Length: 36"
Lux (lx): 11 lx
Candelas (cd): 542 cd
Rated Life: 50,000 hours
Warranty: 7-year comprehensive
Dimmable: No
Color-Changing: No

Product Uses:
 Walls, Fences

Accessories:
 Fang

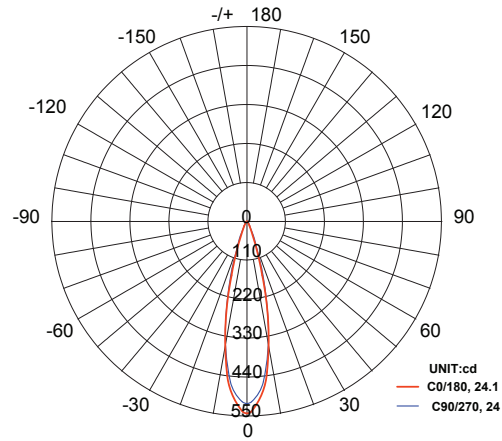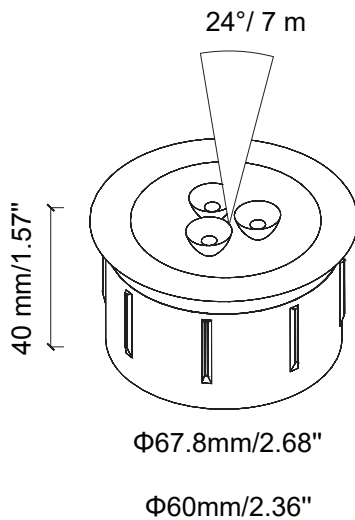

AVERAGE BEAM ANGLE (50%): 24 DEG

Max. Luminous intensity : 542 cd

DISTANCE (FT)	CENTER BEAM (FC) Eavg/Emax	ILLUMINANCE - CONE OF LIGHT	BEAM DIAMETER (FT)
3.25	32.84/49.57		1.37
6.25	8.21/13.39		2.73
10	3.74/5.65		4.17
13	2.05/3.10		5.43
16.5	1.34/2.01		6.93
19.5	0.91/1.39		8.16
23	0.68/1.02		9.63

