

# Ruby RL-RUBY-60-SS

Recessed Light

Product Finishes: ■ ■





## Specifications:

**Voltage:** 12V AC  
**Wattage:** 0.4  
**Volt Amps:** 0.7  
**Lumens:** 16  
**Color Temp:** 2700k  
**IP Rating:** 67  
**CRI:** 93  
**Light Source:** Integrated

**Material:** Polycarbonate  
**Ring Material:** Stainless Steel  
**Cable Length:** 36"  
**Lux (lx):** 2.9  
**Candelas (cd):** 11.5  
**Rated Life:** 50,000 hours  
**Warranty:** 7-year comprehensive  
**Dimmable:** No  
**Color-Changing:** No  
**Drive-Over Rated:** Yes

**Product Uses:**  
 Pavers, Decks, Stairs,  
 Driveways, Risers, Concrete

**Accessories:**  
 Fang

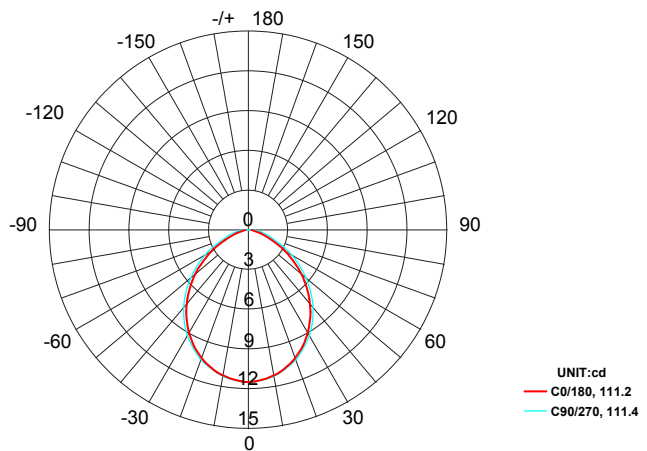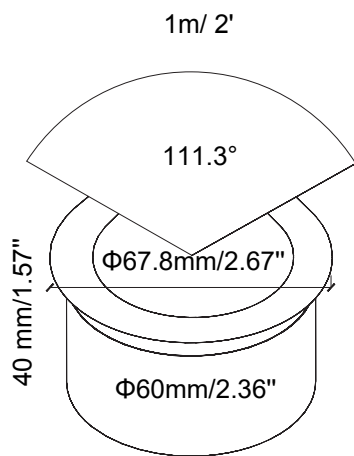

Max. Luminous intensity : 11.5 cd

AVERAGE BEAM ANGLE (50%): 111.3 DEG

DISTANCE (FT)	CENTER BEAM (FC) Eavg/Emax	ILLUMINANCE - CONE OF LIGHT	BEAM DIAMETER (FT)
1	30.36/83.50		0.28
1.5	1.43/3.92		0.39
3	0.36/0.98		0.75
5	0.09/0.26		1.27
6.5	1.02 / 2.81		1.63

