

Silo Low PL-SILO-L-BK

Path Light

Product Finishes: ■



Specifications:

Voltage: 12V AC

Wattage: 1.5

Volt Amps: 2.5

Lumens: 60

Color Temp: 2700k

IP Rating: 65

CRI: 93

Light Source: Integrated

Material: Anodized aluminum

Cable Length: 24"

Lux (lx): 2.3 lx

Candelas (cd): 902 cd

Rated Life: 50,000 hours



Warranty: 7-year comprehensive

Dimmable: No

Color-Changing: No

Product Uses:

Pathways, Bushes, Garden Beds, Driveways, Grasses

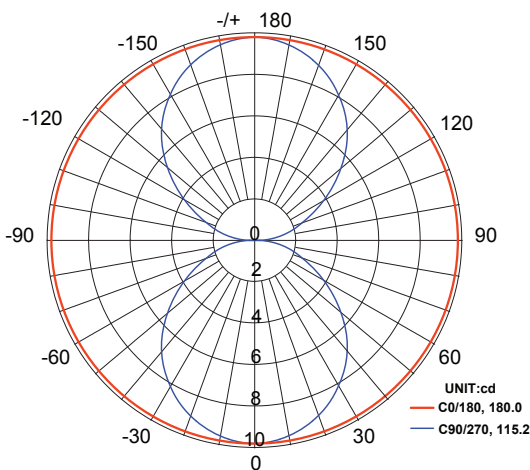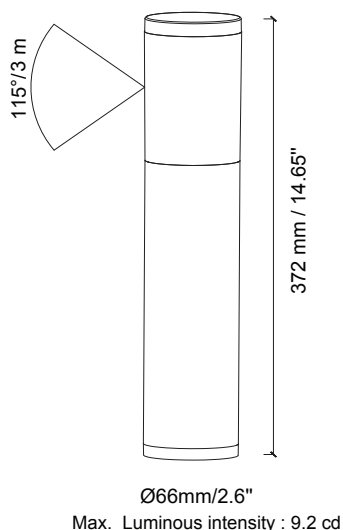

AVERAGE BEAM ANGLE 90/270 (50%): 115.2 DEG
AVERAGE BEAM ANGLE 0/180 (50%): 180 DEG

DISTANCE (FT)	CENTER BEAM (FC) Eavg/Emax	ILLUMINANCE - CONE OF LIGHT	BEAM DIAMETER (FT)
1	0.32/11.33		2.22
1.5	0.06/2.18		3.30
3	0.03/0.95		5.10
5	0.02/0.60		7.33
6.5	0.01/0.26		10.73

AVERAGE BEAM ANGLE 90/270 (50%): 115.2 DEG



support@boldpros.com | 1-833-472-9960

boldpros.com