


LED Surface Mount Dome

CANDEX®

warm white 3000k

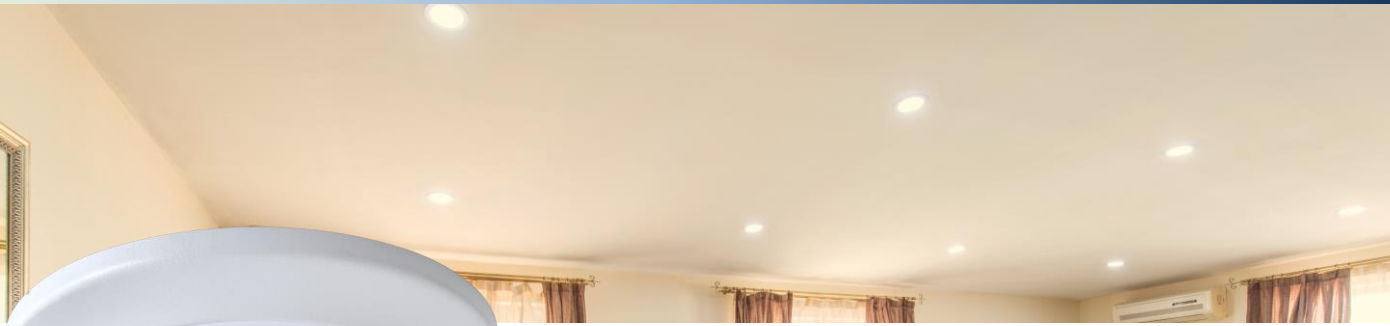

FEATURES & BENEFITS

- Die-cast aluminum trim with acrylic canopy diffuser
- Low-profile modern design for recessed lighting
- Suitable for Wet Locations
- Ambient Warm White 3000K
- Dimmable with TRIAC Dimmers
- Long Lifespan – 50,000 hours
- ETL Listed
- IC Rated for insulation
- Install to 4" junction boxes or 5-6" recessed cans
- For use on ceilings and above showers

SIZE	6"	8"
Model	M630200	M630201
UPC	818564022655	818564022679
Wattage	15W	30W
Equivalent	100W	200W
Brightness	1050lm	2200lm
Dimension	7.40 x 1.30 in.	9.50 x 1.60 in.

HARDWARE INCLUDED



INSTALLATION

4" Junction Boxes



5-6" Recessed Cans



DIMMERS

CANDEX M520138
CANDEX M520140
CANDEX M520141
LEVITON 6674-POW
LUTRON DVCL-153P

SPECIFICATION

Voltage	120VAC, 50/60Hz
Power Factor	>0.9
CCT	3000K
CRI	≥80
Dimming	TRIAC
Lifespan	50,000 Hours
Beam Optics	110°
Finish	White
Construction	Die-Cast Aluminum, Acrylic Diffuser
Location	Indoor / Outdoor
Rated	Wet Location
Warranty	5-Year Limited

