


LED CANDLE FILAMENT LOW VOLTAGE

40W Replacement 2700K Non-Dimmable 12V

\$0.48 Estimated Yearly Energy Cost (3 hours/day)



SPECIFICATIONS


SHAPE	TECHNOLOGY	BASE	FINISH	CONSTRUCTION	LIGHT COLOR	CCT
C12 Flame Tip	LED Filament	E12	Clear	Glass	Warm White	2700K
WATTAGE	EQUIVALENCE	INPUT VOLTAGE	INPUT FREQUENCY	INPUT CURRENT	POWER FACTOR	DIMMABLE
4W	40W	12V AC/DC	60Hz	350mA	≥0.9 PF	No
LUMENS	EFFICACY	COLOR RENDERING	DIMENSION (in)	DIMENSION (mm)	WEIGHT (lbs)	WEIGHT (g)
250lm	63 lm/W	≥80 CRI	3.99 x 1.37 4.66 x 1.35 (L)	101.35 x 34.80 118.36 x 34.29 (L)	0.10	45.36
BEAM SPREAD	RATED HOURS	RATED YEARS	OPERATING TEMPERATURE		LOCATION	ENCLOSED
360°	25,000 Hrs	18.3 Yrs	-4° to 104°F (-20° to 40°C)		Damp	No

SAFETY & COMPLIANCE

ENERGY STAR	SAFETY RATED	CA COMPLIANT	ROHS COMPLIANT	FCC COMPLIANT	WARRANTY
No	-	-	Yes	Yes	2 Year Limited

PACKAGING

MODEL	UPC	PACKAGED	BULBS PER UNIT	UNITS PER PACK	UNITS PER CASE
M850198 (-L)	818564021894	Color Box	1	10	100

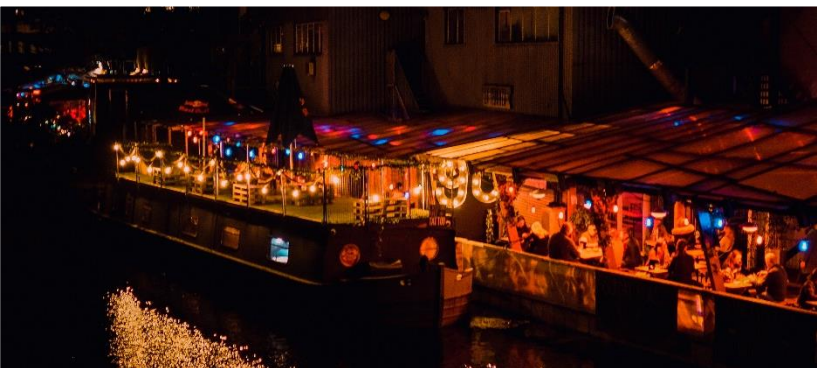

Specifications are subject to change without notice. Please visit www.candexlighting.com for most updated information.

CANDEX, INC. 2022®