

LED 4FT T8 BYPASS OMNI-DIRECTIONAL

36W Replacement 5000K Bi-Pin Type B

\$2.17 Estimated Yearly Energy Cost (3 hours/day)



SPECIFICATIONS


SHAPE	TECHNOLOGY	BASE	FINISH	CONSTRUCTION	LIGHT COLOR	CCT
T8 4FT	LED	G13 Double-Ended	Frosted	Nano	Daylight	5000K
WATTAGE	EQUIVALENCE	INPUT VOLTAGE	INPUT FREQUENCY	INPUT LINE	BALLAST	DIMMABLE
15W	36W	120-277V	60Hz	Type B	Bypass	No
LUMENS	EFFICACY	COLOR RENDERING	DIMENSION (in)	DIMENSION (mm)	WEIGHT (lbs)	WEIGHT (g)
1500lm	100 lm/W	≥80 CRI	48.00 x 1.27	1,219.20 x 32.30	1.00	453.59
BEAM SPREAD	RATED HOURS	RATED YEARS	OPERATING TEMPERATURE		LOCATION	ENCLOSED
300°	50,000 Hrs	45.7 Yrs	-4° to 104°F (-20° to 40°C)		Damp	No

SAFETY & COMPLIANCE

ENERGY STAR	SAFETY RATED	CA COMPLIANT	ROHS COMPLIANT	FCC COMPLIANT	WARRANTY
No	UL Listed, DLC Listed	-	Yes	Yes	2 Year Limited

PACKAGING

MODEL	UPC	PACKAGED	LAMPS PER UNIT	UNITS PER PACK	UNITS PER CASE
M850224	818564020446	Color Box	1	4	40

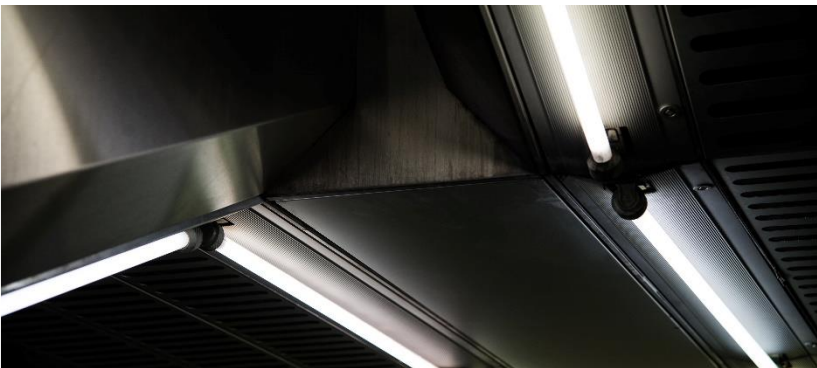

Specifications are subject to change without notice. Please visit www.candexlighting.com for most updated information.

CANDEX, INC. 2022®