

LED Bi-Pin G9

75W Replacement 3000K Dimmable 120V

\$0.72 Estimated Yearly Energy Cost (3 hours/day)



SPECIFICATIONS


SHAPE	TECHNOLOGY	BASE	FINISH	CONSTRUCTION	LIGHT COLOR	CCT
T4	LED	G9	White	Ceramic	Warm White	3000K
WATTAGE	EQUIVALENCE	INPUT VOLTAGE	INPUT FREQUENCY	INPUT CURRENT	POWER FACTOR	DIMMABLE
6W	75W	120V	60Hz	80mA	≥0.7 PF	Yes
LUMENS	EFFICACY	COLOR RENDERING	DIMENSION (in)	DIMENSION (mm)	WEIGHT (lbs)	WEIGHT (g)
650lm	108 lm/W	≥80 CRI	2.90 x 0.74	73.66 x 18.80	0.10	45.36
BEAM SPREAD	RATED HOURS	RATED YEARS	OPERATING TEMPERATURE		LOCATION	ENCLOSED
360°	10,000 Hrs	9.1 Yrs	-4° to 104°F (-20° to 40°C)		Damp	No

SAFETY & COMPLIANCE

ENERGY STAR	SAFETY RATED	CA COMPLIANT	ROHS COMPLIANT	FCC COMPLIANT	WARRANTY
No	ETL Listed	-	Yes	Yes	2 Year Limited

PACKAGING

MODEL	UPC	PACKAGED	BULBS PER UNIT	UNITS PER PACK	UNITS PER CASE
M850364	818564026783	Pegged Blister	1	10	60

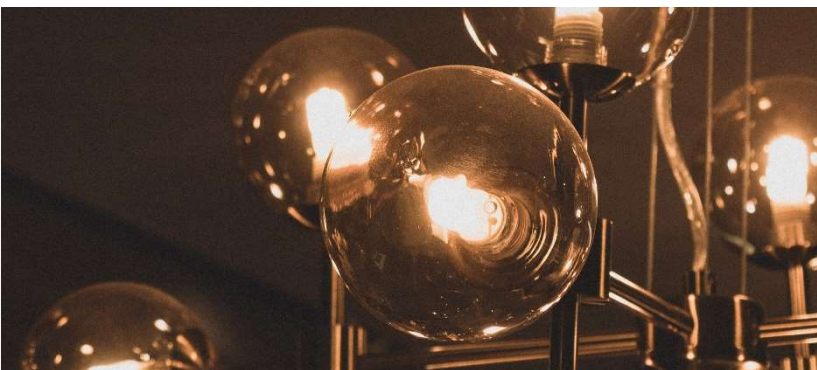

Specifications are subject to change without notice. Please visit www.candexlighting.com for most updated information.

CANDEX, INC. 2022®