

LED 2FT T8 HYBRID FROSTED

18W Replacement 5000K Daylight Bi-Pin

Hybrid A+B / Ballast Bypass / Ballast Compatible / Double-Ended



SPECIFICATIONS


| SHAPE | TECHNOLOGY | BASE | FINISH | CONSTRUCTION | LIGHT COLOR | CCT |
|-------------|-------------|-----------------|-----------------------------|----------------|-------------------|-------------|
| T8 2FT | LED | Bi-Pin G13 | Frosted | Aluminum + PC | Daylight | 5000K |
| WATTAGE | EQUIVALENCE | INPUT VOLTAGE | INPUT FREQUENCY | INPUT LINE | BALLAST | DIMMABLE |
| 9W | 18W | 120-277V | 60Hz | Type A+B | Bypass/Compatible | No |
| LUMENS | EFFICACY | COLOR RENDERING | DIMENSION (in) | DIMENSION (mm) | WEIGHT (lbs) | WEIGHT (oz) |
| 1170lm | 130 lm/W | ≥80 CRI | 24.00 x 1.27 | 609.60 x 32.30 | 0.75 | 10.00 |
| BEAM SPREAD | RATED HOURS | RATED YEARS | OPERATING TEMPERATURE | | LOCATION | ENCLOSED |
| 120° | 50,000 Hrs | 45.7 Yrs | -4° to 104°F (-20° to 40°C) | | Damp | No |

SAFETY & COMPLIANCE

| ENERGY STAR | SAFETY RATED | CA COMPLIANT | ROHS COMPLIANT | FCC COMPLIANT | WARRANTY |
|-------------|-----------------------|--------------|----------------|---------------|----------------|
| No | UL Listed, DLC Listed | - | Yes | Yes | 2 Year Limited |

PACKAGING

| MODEL | UPC | PACKAGED | LAMPS PER UNIT | UNITS PER PACK | UNITS PER CASE |
|---------|-----|----------|----------------|----------------|----------------|
| M850391 | - | Case Box | 1 | - | 25 |

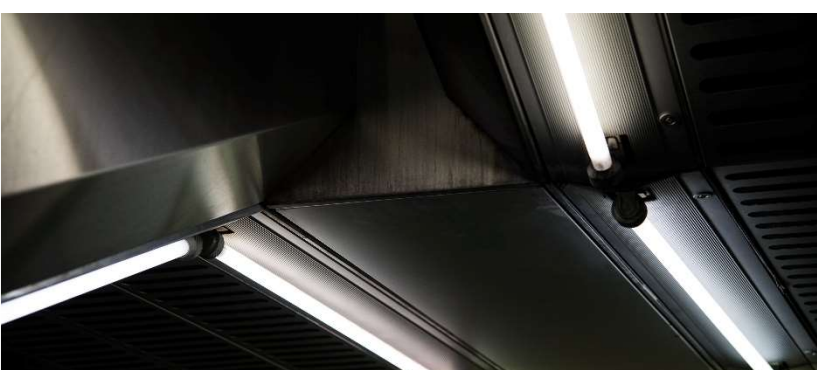

Specifications are subject to change without notice. Please visit www.candexlighting.com for most updated information.

CANDEX, INC.®