

# LED 4FT T8 TUNABLE 4WTT 4CCT

24/30/36/40W Replacement 4CCT Frosted Bi-Pin

Hybrid A+B / Ballast Bypass / Ballast Compatible / Double-Ended



## SPECIFICATIONS


SHAPE	TECHNOLOGY	BASE	FINISH	CONSTRUCTION	CCT	
T8 4FT	LED	G13	Frosted	AL + PC	3500/4000/5000/6500K	
WATTAGE	EQUIVALENCE	INPUT VOLTAGE	INPUT FREQUENCY	INPUT LINE	DIMMABLE	EFFICACY
12/15/18/20W	24/30/36/40W	120-277V	60Hz	Hybrid A+B	No	130 lm/W
BRIGHTNESS		COLOR RENDERING	DIMENSION (in)	DIMENSION (mm)	WEIGHT (oz)	WEIGHT (g)
1560/1950/2340/2600lm		≥80 CRI	48.00 x 1.27	1,219.20 x 32.30	7.94	225.00
BEAM SPREAD	RATED HOURS	RATED YEARS	OPERATING TEMPERATURE		LOCATION	ENCLOSED
120°	50,000 Hrs	45.7 Yrs	-4° to 104°F (-20° to 40°C)		Damp	No

## SAFETY & COMPLIANCE

ENERGY STAR	SAFETY RATED	CEC COMPLIANT	ROHS COMPLIANT	FCC COMPLIANT	WARRANTY
-	UL Listed, DLC Listed	-	Yes	Yes	2-Year Limited

## PACKAGING

MODEL	UPC	RETAIL UNIT PKG	LAMPS PER UNIT	UNITS PER PACK	UNITS PER CASE
M850406	-	-	1	-	25

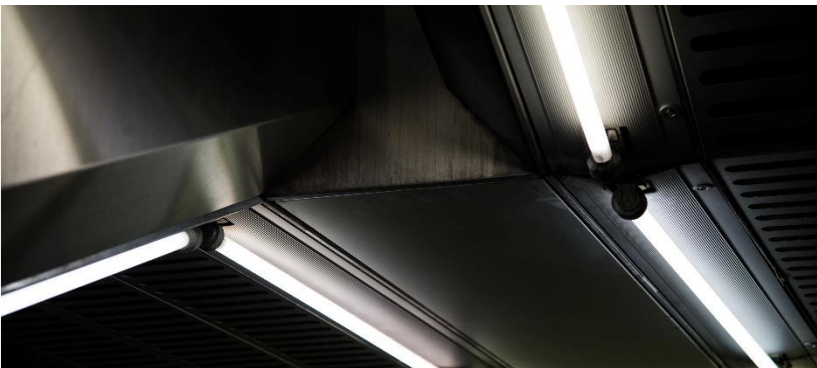

Specifications are subject to change without notice. Please visit [www.candexlighting.com](http://www.candexlighting.com) for most updated information.

CANDEX, INC.®