


# LED 8FT T8 TUNABLE 4WTT 4CCT

65/70/75/80W Replacement 4CCT Frosted Single Pin

Type B / Ballast Bypass / Double-Ended

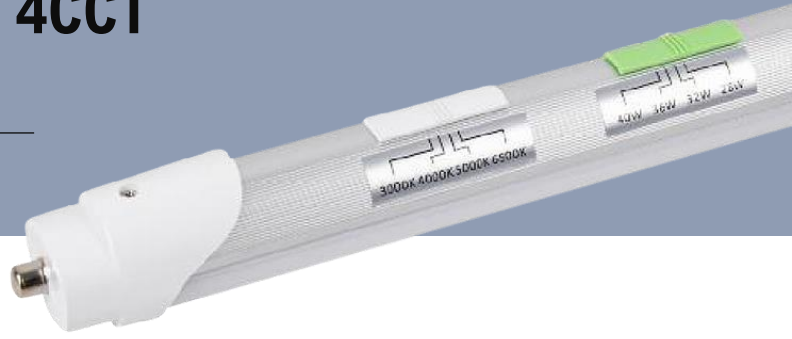

## SPECIFICATIONS


SHAPE	TECHNOLOGY	BASE	FINISH	CONSTRUCTION	CCT	
T8 8FT	LED	FA8	Frosted	AL + PC	3500/4000/5000/6500K	
WATTAGE	EQUIVALENCE	INPUT VOLTAGE	INPUT FREQUENCY	INPUT LINE	DIMMABLE	EFFICACY
28/32/36/40W	65/70/75/80W	120-277V	60Hz	Type B	No	130 lm/W
BRIGHTNESS		COLOR RENDERING	DIMENSION (in)	DIMENSION (mm)	WEIGHT (oz)	WEIGHT (g)
3640/4160/4680/5200lm		≥80 CRI	96.00 x 1.27	2,438.40 x 32.30	15.87	450.00
BEAM SPREAD	RATED HOURS	RATED YEARS	OPERATING TEMPERATURE		LOCATION	ENCLOSED
120°	50,000 Hrs	45.7 Yrs	-4° to 104°F (-20° to 40°C)		Damp	No

## SAFETY & COMPLIANCE

ENERGY STAR	SAFETY RATED	CEC COMPLIANT	ROHS COMPLIANT	FCC COMPLIANT	WARRANTY
-	UL Listed, DLC Listed	-	Yes	Yes	2-Year Limited

## PACKAGING

MODEL	UPC	RETAIL UNIT PKG	LAMPS PER UNIT	UNITS PER PACK	UNITS PER CASE
M850412	-	-	1	-	15

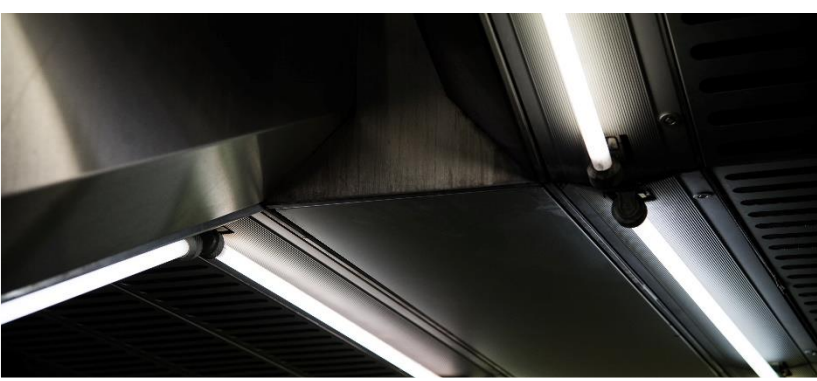

Specifications are subject to change without notice. Please visit [www.candexlighting.com](http://www.candexlighting.com) for most updated information.

CANDEX, INC.®