

# 7" LED DOME NIGHT LIGHT


Surface Mount Downlight / Slim / 3CCT-Select



DKA-06156CT

Heat Dissipating Aluminum Die-Cast / Acrylic Diffuser

Amber / 3W / 110lm / 2000K



## FINISHES



White / **WH**



Silver / **SL**



Brushed Nickel / **BN**



Black / **BL**

## SPECIFICATIONS

TYPE	TECHNOLOGY	SIZE	CONSTRUCTION	INSTALLATION
Surface Mount	LED	7" Round Dome	Aluminum Die-Cast	J-Box / Can
WATTAGE	EQUIVALENCE	VOLTAGE	FREQUENCY	CURRENT
15W / 3W	120W	120V	60Hz	120mA
BRIGHTNESS	EFFICACY	COLOR RENDERING	POWER FACTOR	DIMMING
1300lm / 110lm	87 lm/W	≥90 CRI	≥0.9 PF	TRIAC
CCT OPERATION	BEAM OPTICS	LIFESPAN	DIMENSION (in)	WEIGHT (lb)
3CCT / Amber 2000K	110°	30,000 Hrs / 27.4 Yrs	7.07 x 1.03	0.60


## COMPLIANCE

LISTED	COMPLIANT	LOCATION	CALIFORNIA	OPERATING TEMPERATURE	WARRANTY
ETL	FCC, RoHS	Damp	-	14° to 113°F (-10° to 45° C)	3 Year Limited

## PACKAGING

UNIT	PACKAGED	CASE QUANTITY
LED Light Fixture w/ Mounting Hardware	1 Unit per Box	24 Units per Master Case

## COLOR TEMPERATURES

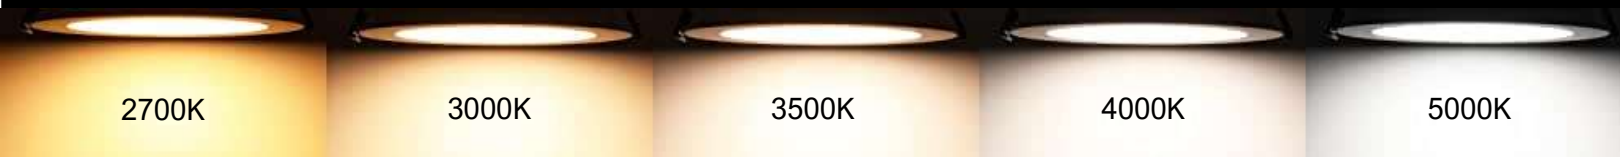

Specifications are subject to change without notice. Please visit [www.candexlighting.com](http://www.candexlighting.com) for most updated information.

CANDEX, INC.®

# 7" LED DOME NIGHT LIGHT


Surface Mount Downlight / Slim / 3CCT-Select






DKA-06156CT

Heat Dissipating Aluminum Die-Cast / Acrylic Diffuser

Amber / 3W / 110lm / 2000K



## DIAGRAMS CCT SELECT

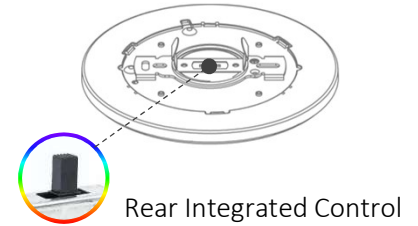

## INSTALLATION



4" Junction Box



5 1/8" Recessed Can

## ORDERING

MODEL	FINISH	COLOR TEMPERATURE
KYD-06C153C8	/WH, /BN, or /BL	/2740 (2700K, 3000K, 4000K) /3050 (3000K, 4000K, 5000K)

Specifications are subject to change without notice. Please visit [www.candexlighting.com](http://www.candexlighting.com) for most updated information. CANDEX, INC.®