


13" LED NIGHT LIGHT RING

Surface Mount Downlight / 3CCT

Heat Dissipating Aluminum Die-Cast / Acrylic Diffuser



Amber / 4W / 150lm / 2000K



RCLR13R26CT

FINISHES



White / **WH**



Black / **BL**

SPECIFICATIONS

TYPE	TECHNOLOGY	SIZE	CONSTRUCTION	INSTALLATION
Surface Mount	LED	13" Round Disc	Aluminum Die-Cast	J-Box
WATTAGE	EQUIVALENCE	VOLTAGE	FREQUENCY	CURRENT
24W / 4W	220W	120V	60Hz	200mA
BRIGHTNESS	EFFICACY	COLOR RENDERING	POWER FACTOR	DIMMING
2400lm / 150lm	100 lm/W	≥80 CRI	≥0.9 PF	TRIAC
CCT OPERATION	BEAM OPTICS	LIFESPAN	DIMENSION (in)	WEIGHT (lb)
3CCT / Amber 2000K	110°	30,000 Hrs / 27.4 Yrs	12.75 x 1.01	2.00


COMPLIANCE

LISTED	COMPLIANT	LOCATION	CALIFORNIA	OPERATING TEMPERATURE	WARRANTY
ETL	FCC, RoHS	Damp	-	14° to 113°F (-10° to 45° C)	3 Year Limited

PACKAGING

UNIT	PACKAGED	CASE QUANTITY
LED Light Fixture w/ Mounting Hardware	1 Unit per Box	10 Units per Master Case

COLOR TEMPERATURES

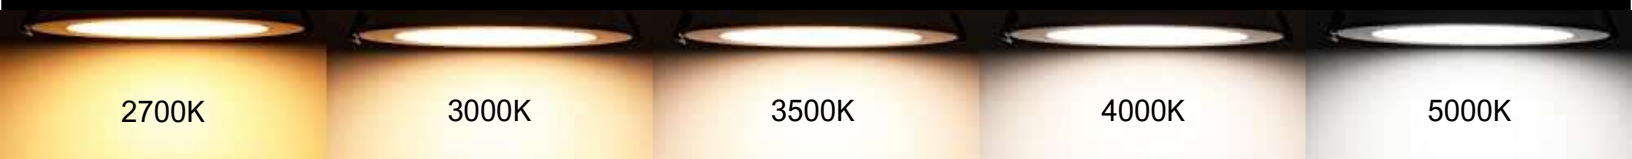

Specifications are subject to change without notice. Please visit www.candexlighting.com for most updated information. CANDEX, INC.®


13" LED NIGHT LIGHT RING

Surface Mount Downlight / 3CCT

Heat Dissipating Aluminum Die-Cast / Acrylic Diffuser





Amber / 3W / 150lm / 2000K



RCLR13R26CT

DIAGRAMS



CCT SELECT



INSTALLATION



4" Junction Box

ORDERING

MODEL	FINISH	COLOR TEMPERATURE
RCLR13R26CT	/WH or /BL	/2740 (2700K, 3000K, 4000K) /3050 (3000K, 4000K, 5000K)

Specifications are subject to change without notice. Please visit www.candexlighting.com for most updated information.