

7.5" LED DISC NIGHT LIGHT


Surface Mount Downlight / 3CCT-Select

Heat Dissipating Aluminum Die-Cast / Acrylic Diffuser

Amber / 3W / 110lm / 2000K



RCLR756CT



FINISHES



White / **WH**



Silver / **SL**



Black / **BL**

SPECIFICATIONS

TYPE	TECHNOLOGY	SIZE	CONSTRUCTION	INSTALLATION
Surface Mount	LED	7.5" Round Disc	Aluminum Die-Cast	J-Box / Can / Canless
WATTAGE	EQUIVALENCE	VOLTAGE	FREQUENCY	CURRENT
15W / 3W	140W	120V	60Hz	150mA
BRIGHTNESS	EFFICACY	COLOR RENDERING	POWER FACTOR	DIMMING
1500lm / 110lm	100 lm/W	≥80 CRI	≥0.9 PF	TRIAC
CCT OPERATION	BEAM OPTICS	LIFESPAN	DIMENSION (in)	WEIGHT (lb)
3CCT / Amber 2000K	110°	30,000 Hrs / 27.4 Yrs	7.50 x 1.00	0.80


COMPLIANCE

LISTED	COMPLIANT	LOCATION	CALIFORNIA	OPERATING TEMPERATURE	WARRANTY
ETL	FCC, RoHS	Damp	-	14° to 113°F (-10° to 45° C)	3 Year Limited

PACKAGING

UNIT	PACKAGED	CASE QUANTITY
LED Light Fixture w/ Mounting Hardware	1 Unit per Box	10 Units per Master Case

COLOR TEMPERATURES

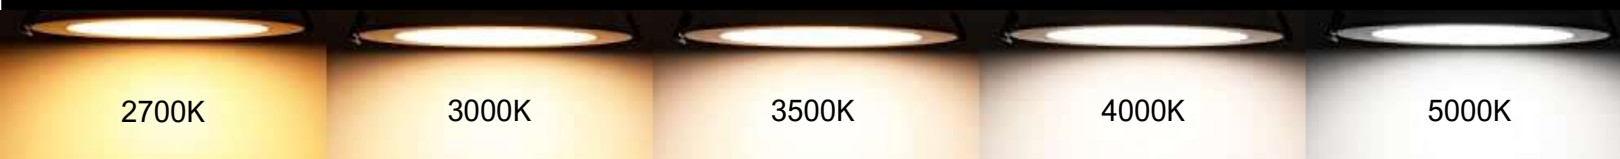

Specifications are subject to change without notice. Please visit www.candexlighting.com for most updated information.


CANDEX, INC.®

7.5" LED DISC NIGHT LIGHT

Surface Mount Downlight / 3CCT-Select




Heat Dissipating Aluminum Die-Cast / Acrylic Diffuser

Amber / 3W / 110lm / 2000K



RCLR756CT

DIAGRAMS CCT SELECT

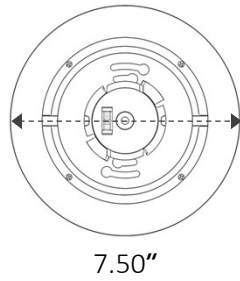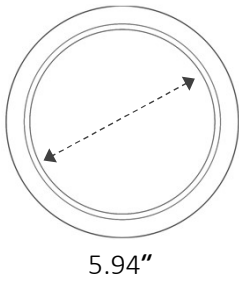

INSTALLATION



4" Junction Box



5 1/8" Recessed Can



Open Hole / Canless

ORDERING

MODEL	FINISH	COLOR TEMPERATURE
RCLR756CT	/WH, /SL, or /BL	/2740 (2700K, 3000K, 4000K) /3050 (3000K, 4000K, 5000K)

Specifications are subject to change without notice. Please visit www.candexlighting.com for most updated information. CANDEX, INC.®