

Standard




Electronic



Specification

Material	Solid die cast zinc for Copper Creek, forged brass for Montana Forge		
Latches	Latches are part of the Handleset interior trim assembly. (See page 24)		
Strikes	Strikes are part of the Handleset interior trim assembly. (See page 24)		
Cylinder	Standard: Kwikset, KW1 5-pin	Optional: Schlage C 5-Pin	
Door Prep	Edge Bore: 1" Latch Mortise: 1" x 2-1/4"	Cross Bores: 2-1/8" Backset: 2-3/8" or 2-3/4"	Hole Spacing: 5-1/2"
Door Thickness	Minimum: 1-3/4" - Maximum: 2" Optional: Thick door kit, available upon request for non-electronic handleset, Maximum thickness: 2-1/4" . \$7.20 adder to list price. (See page 27)		
UL Listed	Meets UL 20 minute rating with UL latch, \$14.50 adder to list price.		
Handing	Non-handed design		
***Note	Handleset are sold as a single unit composing of exterior trim only. Latch and strike are included with interior trim and must be purchased separately.		

Product Dimensions

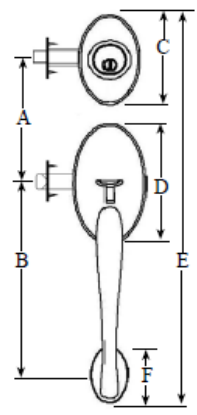

	Colonial	Fashion	Heritage	Modern
A Cross Bores Center to Center	5-1/2			
B Latch to Thru-bolt Center to Center	8-7/16			
C Deadbolt Rosette	H: 3-3/8 W: 2-5/8	H: 3-1/2 W: 2-5/8	H: 3-1/2 W: 2-3/8	H: 2-3/4 W: 2-3/4
D Main Escutcheon	H: 4-1/8 W: 3	H: 4-1/2 W: 2-5/8	H: 4-3/8 W: 2-3/4	H: 3-1/8 W: 2-3/4
E Overall Handleset	H: 17	H: 18	H: 17	H: 17
F Lower Rosette	H: 2-7/16 W: 1-7/8	H: 3 W: 1-1/2	H: 2-9/16 W: 1-5/8	H: 2-1/16 W: 2-1/16

Copper Creek Handleset Interior Trims

Interconnected Trim Option



Contemporary Interior Levers



Optional Rosettes



Standard Interior Levers



Note: Specify handing for Kash (KL) & Waverlie (WL) trims, all other lever trims are non-handed.

Interior Knobs



Specification

ANSI Grade	Grade 3		
Latch	4-Way Adjustable round corner latch (RCL) with drive-in collar (RFL).	Optional: Square corner latch (SCL), no upcharge.	
Strike	Full lip round corner (RCS).	Optional: Extended full lip. (see page 24)	
Door Prep	Edge Bore: 1" Latch Mortise: 1" x 2-1/4"	Cross Bores: 2-1/8" Backset: 2-3/8" - 2-3/4"	Hole Spacing: 5-1/2"
Door Thickness	Minimum: 1-3/8" - Maximum: 1-3/4" - Thick door option available for handlesets, (see page 23)		