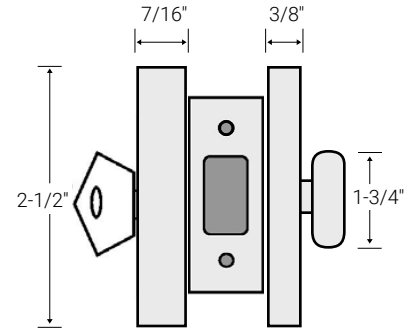



DBS2410SS

Single Cylinder Deadbolt


DBS2405SS

 Half-bore One Sided
Deadbolt

Specification

ANSI Grade BHMA	ANSI 156.2 Grade 3	200,000 cycles
Cylinder	Standard: KW1 5-pin	Optional: Schlage C
Latch	4-Way Adjustable round corner latch with drive-in collar (RFL).	Optional: Square corner latch (SCL), no upcharge.
Strike	PC-DS16 & PC-DS26: full lip round corner (RCS).	Optional: Extended full lip.
Keys	Standard bow nickel plated. 2 keys included with each keyed function lockset only.	
Keying	As specified: Master, Builder, Keyed Alike or Keyed Different	
Door Prep	Edge Bore: 1" Latch Mortise: 1" x 2-1/4"	Cross Bores: 2-1/8" Backset: 2-3/8" - 2-3/4"
Door Thickness	Minimum: 1-3/8" - Maximum: 1-3/4" Thick door option available. Maximum: 2-1/4".	
UL Listed	Meets UL 20 minute rating with UL latch.	
ADA	ADA Compliant.	
Warranty	Lifetime mechanical, 5 year finish.	


Copper Creek Deadbolt Functions

Function	Code	Operation
Half-bore One Sided	2405	Inside turn-piece throws or retracts 1" deadbolt latch.
Single Cylinder	2410	Inside turn-piece and exterior key throws or retracts the 1" deadbolt latch.

Stocking Finishes

Finish	2410	2405	Case Quantity
Black (BC)	x	x	12
Polished Stainless (PS)	x		12
Satin Stainless (SS)	x	x	12
Tuscan Bronze (TB)	x		12