





KARNAK

Post-bathing paradise. Imagine a place where all your towels can gently warm while you relax in the bath. This heated rail provides lots of space – even for the longest of towels.


i Model shown on opposite page: 5K17-S (brushed matt)

KARNAK

SS MATERIAL
 10 WORKING PRESSURE
 120°C WORKING TEMP.
 O C OPEN/CLOSED SYSTEM
 V MOUNT POSITION
 20 YEARS WARRANTY

Product Name	Height (mm)	Length (mm)	Depth (mm)	Fuel Options (E/H/D)	Towel Gaps	Pipes or Sections	Heat Output (BTU/w) ΔT 50		E: Electric only		Finish S: Brushed Matt P: Polished
									Choice of Elements (Watts)		
3K10	1000	310	30	E/H/D	11	12	519	152	150	300	S,P
3K14	1440	310	30	E/H/D	16	17	735	215	300	400	S,P
4K5	480	420	30	E/H/D	5	6	351	103	90	150	S,P
4K14	1440	420	30	E/H/D	16	17	995	291	300	400	S,P
5K10	1000	500	30	E/H/D	11	12	836	245	400	600	S,P
5K14	1440	500	30	E/H/D	16	17	1185	347	300		S,P
5K17	1700	500	30	E/H/D	19	20	1468	430	400	600	S,P

We recommend the 3 Bar Safety Valve for all ELECTRIC ONLY (E) products. Dual Fuel is possible either by use of "T" piece and radiator valve or by use of ONE850 or ONE851 (4 way valve)

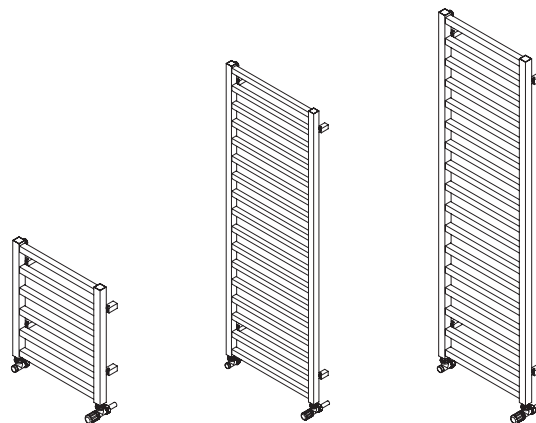

Call us on 01908 271155 or visit www.aeon.uk.com