

PEGASUS

This design is larger than life. It is tiered against the wall to create an unusual, slimline look that boasts unrivalled attention to detail. What you might call a statement piece.

R Model shown: PAG515-60-S (brushed matt)

PEGASUS

SS MATERIAL
10 WORKING PRESSURE
120°C WORKING TEMP.
O C OPEN/CLOSED SYSTEM
V H MOUNT POSITION
20 YEARS WARRANTY


Product Name	Height (mm)	Length (mm)	Depth (mm)	Fuel Options (E/H/D)	Pipes or Sections	Heat Output (BTU/w) ΔT 50		E: Electric only		Finish S: Brushed Matt P: Polished
								Choice of Elements (Watts)		
PAG505-20	510	550	40	E/H/D	20	3039	890	300	400	S, P
PAG510-40	1010	550	40	E/H/D	40	6079	1780	400	600	S, P
PAG515-60	1510	550	40	E/H/D	60	9118	2670	600	900	S, P

We recommend the 3 Bar Safety Valve for all ELECTRIC ONLY (E) products. Dual Fuel is possible either by use of "T" piece and radiator valve or by use of ONE850 or ONE851 (4 way valve)

MERIDIEN

Striking and simple. This tall ladder-style radiator doubles as a towel rail. Its narrow dimensions make it perfect for bathrooms with high ceilings and limited wall space.

T Model shown: MER100-S (brushed matt)

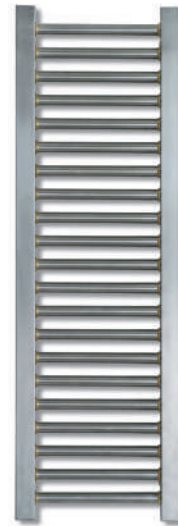

MERIDIEN

SS MATERIAL
10 WORKING PRESSURE
120°C WORKING TEMP.
O C OPEN/CLOSED SYSTEM
V MOUNT POSITION
20 YEARS WARRANTY

Product Name	Height (mm)	Length (mm)	Depth (mm)	Fuel Options (E/H/D)	Pipes or Sections	Heat Output (BTU/w) ΔT 50		E: Electric only		Finish S: Brushed Matt P: Polished
								Choice of Elements (Watts)		
MER100	1000	330	40	E/H/D	21	1766	517	300		S, P
MER150	1500	330	40	E/H/D	32	2497	731	400	600	S, P
MER180	1800	330	40	E/H/D	39	3173	929	600	900	S, P
MER200	2000	330	40	E/H/D	43	3532	1034	600	900	S, P

We recommend the 3 Bar Safety Valve for all ELECTRIC ONLY (E) products. Dual Fuel is possible either by use of "T" piece and radiator valve or by use of ONE850 or ONE851 (4 way valve)