

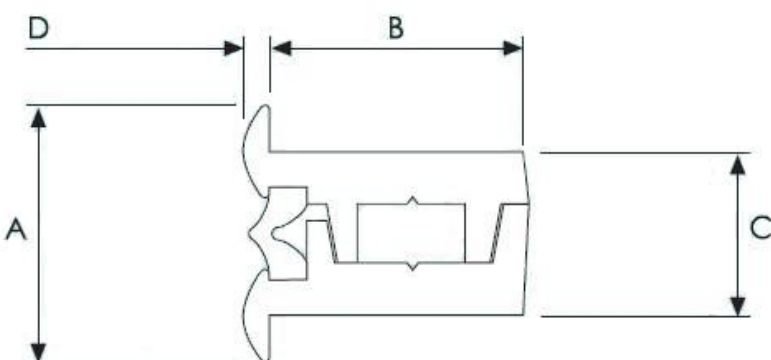
## Centaflex Continuous Hinge - Specifications

Centaflex is a one piece continuous hinge made of flexible resin, combining the high strength of engineering resins with excellent flexibility. Centaflex has an excellent flex-life at temperatures ranging from -40°C to 50°C (-40°F to 122°F).

During the manufacturing process, co-extruded rigid PVC profiles are fused together with the molten Centaflex Hinge membrane, creating an extremely strong and resilient hinge. A one metre length fitted horizontally has a Safe Working Load (SWL) of 100kg.

Centaflex offers many features and benefits over other conventional continuous hinges, including:

- Durable – tested to over 50,000 operating cycles
- Secure – interlocking profile when closed
- Maintenance free
- Aesthetically pleasing low exterior profile
- Concealed fixing
- Easy to fit
- Weatherproof continuous seal
- Corrosion resistant
- UV stabilized
- Excellent flex life

			<b>Centaflex</b>	
			Continuous hinge. Black PVC profiles fused together with a flexible membrane.	
CFlex2	2m Lengths		Weight 1kg/2.2lb	
CFlex3	3m Lengths		Weight 1.5kg/3.3lb	
	A	B	C	D
Metric (mm)	28	23	16	2
Imperial (in.)	1.10	0.91	0.63	0.08
165° opening, 28mm face				

### Distributors & Agents for Rubber, Foam & Matting Supplies

- ✓ Self Adhesive Sealing Tape
- ✓ Insertion, Neoprene & Nitrile Rubber
- ✓ Commercial Matting
- ✓ Door & Boot Rubber Seals
- ✓ Grip Products



- ✓ Auto & Marine: Matting/Carpets/Vinyl
- ✓ Latex & Foam Mattresses
- ✓ Foam Cut to Size
- ✓ Marine Fender & Hatch Seals