
Harley Valance

9334

Each valance section is made as a flat piece (contrast lined). When placed over the pole, the back of the valance can hang 18" or up to 20" deep at the deepest point. The deeper the back of the valance hangs, the shorter the front of the valance will be and more contrast lining will show. The valance sections range from 14" to 22" wide. Alteration instructions are included.

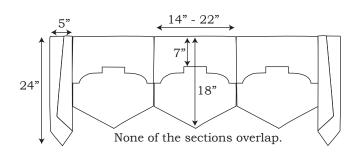

A tail can be placed at each end of the valance sections. **The tail is 5" wide and about 24" deep** from the top of the pole. It does not have a return, which makes it important to use decorative brackets to install the pole. The depth of the tail can be altered. It attaches to the top of the pole with hook and loop tape, or staples.

Fabric Suggestions: Light, medium, or heavy fabrics can be used. With light fabrics, use an interlining. Everything should be self or contrast lined.

Trims: Trims may be used on the bottom edge of all pieces. Deep trims are not recommended as they will cover the contrast lining that shows on the front of the valance. Because of the intricate shape, trims will be more difficult to apply.

YARDAGE

To determine your valance section width, subtract 5" for each tail. Then divide by the number of sections desired. To use the patterns, **sizes need to stay between 14" and 22".**

With so may different fabric widths and repeats available today, we find it works best if we give you the actual pattern sizes so you can determine how they will fit on your fabric.

Upright Cut

The valance pattern is	vour width plus 1" x 32" deep
The tail pattern is	J 1

Lengthwise Cut: The width measurement will run with the selvage.

Same amount of contrast lining will be needed for all the above. Same amount of interlining (optional).

TRIM (Trims must be able to curve)

Each 14" Valance	Bottom only = 18"	Top only = $21''$
	Bottom only = $22''$	
	Bottom only = $26''$	
Each Tail		1 /