


CAT50 End Mill Holders

CAT 50
Premium
Balanced
25X
RPM

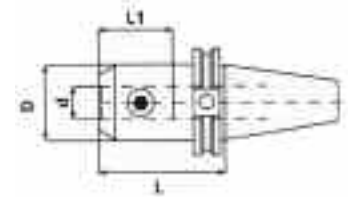

- DIN coolant thru the flange at no extra charge
- Traverse ground shank to obtain optimum accuracy
- Meets or exceeds ANSI specifications
- .0002" TIR or better ensures the best possible cutting tool life
- DIN Coolant option - standard
- All Ground Body
- 100% Forged Construction
- Balanced to

CAT50 END MILL HOLDERS

Taper	Hole Dia. (d)	Gage Length (L)	L1	D	Set Screw	Part No.
CT50	3/8"	2.50"	1.26"	1.00"	3/8-24	GS531100
CT50	3/8"	4.00"	1.26"	1.00"	3/8-24	GS531102
CT50	1/2"	4.00"	1.50"	1.38"	7/16-20	GS531120
CT50	1/2"	6.00"	1.50"	1.38"	7/16-20	GS531122
CT50	1/2"	8.00"	1.48"	1.38"	7/16-20	GS531124
CT50	5/8"	4.00"	1.61"	1.65"	9/16-18	GS531130
CT50	5/8"	6.00"	1.61"	1.65"	9/16-18	GS531132
CT50	5/8"	8.00"	1.57"	1.65"	9/16-18	GS531134
CT50	3/4"	4.00"	1.77"	1.89"	5/8-18	GS531140
CT50	3/4"	6.00"	1.77"	1.89"	5/8-18	GS531142
CT50	3/4"	8.00"	1.77"	1.89"	5/8-18	GS531144
CT50	3/4"	12.00"		1.48"		853-233L
CT50	7/8"	3.75"	2.08"	2.00"	5/8-18	GS531148
CT50	1"	4.00"	2.36"	2.36"	3/4-16	GS531154
CT50	1"	6.00"	2.36"	2.36"	3/4-16	GS531156
CT50	1"	8.00"	2.36"	2.36"	3/4-16	GS531158
CT50	1"	12.00"		1.62"		853-235L
CT50	1-1/4"	4.00"	2.55"	2.48"	3/4-16	GS531162
CT50	1-1/4"	6.00"	2.55"	2.48"	3/4-16	GS531164
CT50	1-1/4"	8.00"	2.55"	2.48"	3/4-16	GS531166
CT50	1-1/4"	12.00"		1.88"		853-237L
CT50	1-1/2"	4.50"	2.83"	2.99"	3/4-16	GS531170
CT50	1-1/2"	7.00"	2.83"	2.99"	3/4-16	GS531172
CT50	2"	5.37"	3.34"	3.74"	1"-14	GS531178
CT50	2"	8.00"	3.34"	3.74"	1"-14	GS531180
CT50	2"	10.00"	3.34"	3.74"	1"-14	GS531182