


CAT Taper Shell Mill Holders

- Shank traverse ground to obtain optimum accuracy
- Meets or exceeds ANSI specifications
- .0002" or better ensures the best possible cutting tool life

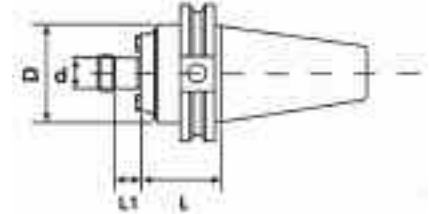

DIN Balanced

CAT40 SHELL MILL HOLDERS

Taper	d	L	D	L1	Key Size	Arbor Thread	Part No.
CT40	1/2"	1.75"	1.38"	0.57"	1/4"	1/4"-28	GS531190
CT40	3/4"	1.75"	1.75"	0.67"	5/16"	3/8"-24	GS531192
CT40	3/4"	4.00"	1.75"	0.67"	5/16"	3/8"-24	GS531194
CT40	1"	1.7"	2.38"	0.67"	3/8"	1/2"-20	GS531196
CT40	1"	4.00"	2.38"	0.67"	3/8"	1/2"-20	GS531198
CT40	1-1/4"	2.00"	2.88"	0.67"	1/2"	5/8"-18	GS531200
CT40	1-1/4"	4.00"	2.88"	0.67"	1/2"	5/8"-18	GS531202
CT40	1-1/2"	2.00"	3.80"	0.93"	5/8"	3/4"-16	GS531204
CT40	1-1/2"	4.00"	3.80"	0.93"	5/8"	3/4"-16	GS531206

CAT50 SHELL MILL HOLDERS

Taper	d	L	D	L1	Key Size	Arbor Thread	Part No.
CT50	3/4"	1.75"	2.00"	0.67"	5/16"	3/8"-24	GS531208
CT50	3/4"	4.00"	2.00"	0.67"	5/16"	3/8"-24	GS531210
CT50	3/4"	6.00"	2.00"	0.67"	5/16"	3/8"-24	GS531212
CT50	3/4"	8.00"	2.00"	0.67"	5/16"	3/8"-24	GS531214
CT50	1"	1.75"	2.75"	0.69"	3/8"	1/2"-20	GS531216
CT50	1"	4.00"	2.75"	0.69"	3/8"	1/2"-20	GS531218
CT50	1"	6.00"	2.75"	0.69"	3/8"	1/2"-20	GS531220
CT50	1"	8.00"	2.75"	0.69"	3/8"	1/2"-20	GS531222
CT50	1-1/4"	1.75"	2.88"	0.69"	1/2"	5/8"-18	GS531224
CT50	1-1/4"	4.00"	2.88"	0.69"	1/2"	5/8"-18	GS531226
CT50	1-1/4"	6.00"	2.88"	0.69"	1/2"	5/8"-18	GS531228
CT50	1-1/4"	8.00"	2.88"	0.69"	1/2"	5/8"-18	GS531230
CT50	1-1/2"	2.00"	3.80"	0.93"	5/8"	3/4"-16	GS531232
CT50	1-1/2"	4.00"	3.80"	0.93"	5/8"	3/4"-16	GS531234
CT50	1-1/2"	6.00"	3.80"	0.93"	5/8"	3/4"-16	GS531236
CT50	1-1/2"	8.00"	3.80"	0.93"	5/8"	3/4"-16	GS531238
CT50	2"	2.00"	4.38"	0.93"	3/4"	1"-14	GS531240