


ADAPV112.5-1230-2T0

BASIC PDU

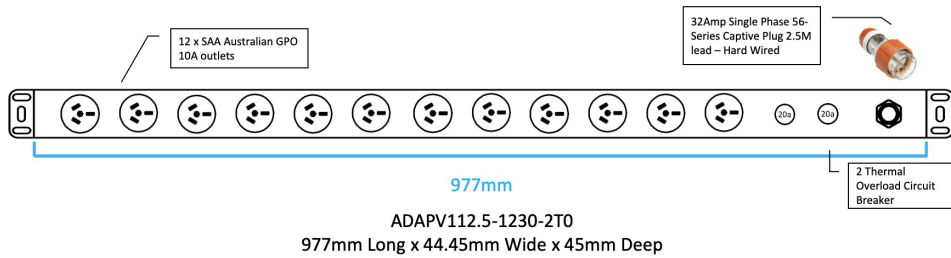

GENERAL

Output	(12) SAA Australian GPO 10A
Input	(1) 32A Single Phase 56 series captive plug on a 3M lead
Output Circuit Protection	(2) Thermal Overload Circuit Breaker

OTHER INFORMATION

Applications	Unmanaged power distribution - IT, Communications, AV
Internal Wiring	Tinned Copper Wire
Wiring Insulation	Silicone Rubber
PDU Colour	Black - Other Colours Available
PDU Dimensions	977mm x 44.45mm x 45mm
PDU Internals	H05S-K 2.5mm ² Multi-Strand silicon insulated wire rated at 48 Amps (nominal temperature) All terminal connections made with lead-free solder

NETWORK OPERATION

Regulatory Approvals	AS/NZS 3000:2007 Electrical Wiring Standards AS/NZS 3820 Electrical Safety Compliance AS/NZS 3760: 2010 Electrical Safety Testing All Associated Cables Approved to AS/NZS 3191
----------------------	--