

MTB HOPPER

USER MANUAL

The kicker is designed for **MTB and BMX** bikes.



Always

wear your helmet.

It is recommended to wear knee pads, gloves and other safety equipment.



Momentum speed for beginners: **20 km/h – 30 km/h** (12 mph – 19 mph).



MTB HOPPER is designed for longevity, to withstand any weather and provide good grip with tires. We recommend to store it in a **dry place**.


Use it responsibly.

Go through all the steps before riding to ensure safety. If you have the opportunity, train together with more experienced riders. Good luck at improving your riding skills!

3 PHASES OF JUMP

FIRST PHASE


NEUTRAL stance in the acceleration zone

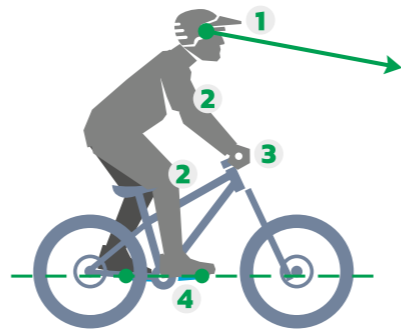

- 1 Look at the ramp in advance.
- 2 Relax your body, gently bend elbows and knees.
- 3 Get into a straight line as soon as possible towards the ramp, avoid the turns.
- 4 After reaching the required speed, hold the pedals parallel to the ground.

SECOND PHASE


DEEP squat as you approach the ramp

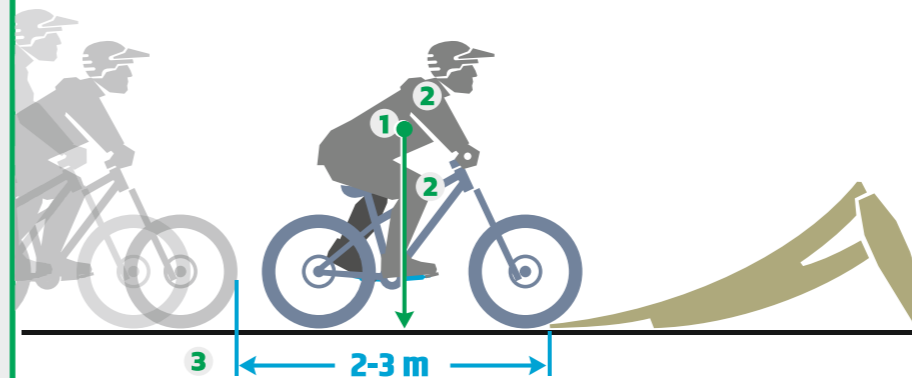

- 1 The squat is done vertically down. The body's center of gravity is in the middle of the bike.
- 2 Elbows and knees are quite strongly bent. Elbows wide, pointing outwards (not back). The chest gets closer to the handlebar and the hips to the seat.
- 3 Start squatting 2-3 m before the ramp.

THIRD PHASE

STANDING UP on the ramp

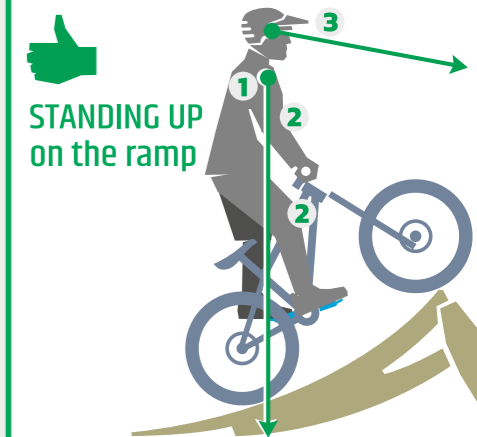


- 1 Standing up is done vertically upwards.
- 2 Body straight. Position body above BB. Elbows and knees straight.
- 3 Raise your head and look at expected landing place.

Reason for UNSTABLE jump and unsafe landing




- 1 **Incorrect pedal position**
Pick up the right speed, stop pedalling as soon as possible and get into the correct pedal position.

Reason #1 for NOSE DIVE

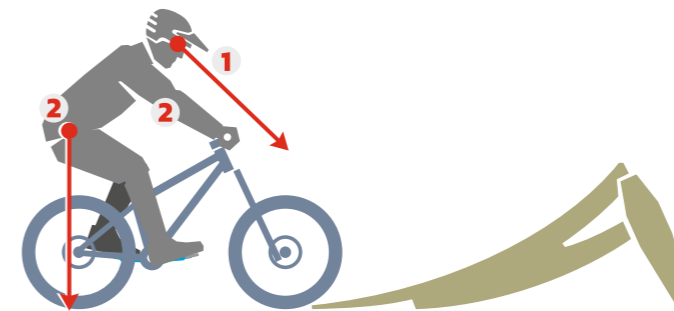

- 1 **Incorrect head position**
The eyes should not look down, but at the highest point of the ramp.
- 2 **Incorrect body position**
Avoid shifting weight over the rear wheel. Outstretched arms restrict full body movement before entering the ramp. A stiff body is one of the reasons for NOSE DIVE.

Reason #2 for NOSE DIVE

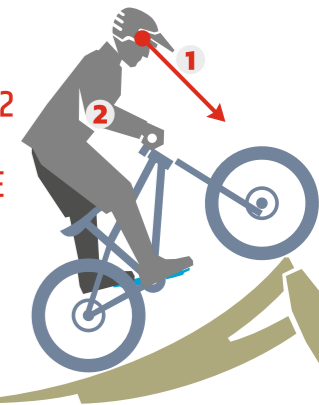

- 1 **Incorrect head position**
- 2 **Incorrect position of arms and body**
Driving onto the ramp you need to straighten both your legs and arms. A chin lift helps to achieve this, as if you wanted to emerge from under water.

AIR ASSEMBLY

Follow engraved numbers on the parts. The numbers are showing the order of assembly. The numbers are on all connection points and have to match: (1 to 1; 2 to 2 and so on).

1. 2. 3. 4. 5. 6. 7. 8. 9. 10.

Mount Legs onto the Front Part. Then grab the ropes and fasten it to the hooks on the legs

HOOK

PUSH DOWN

BEFORE AFTER

PUSH DOWN

PUSH DOWN

Grab the rope that is mounted on the roof part and fasten to the hooks on the front logo part


HOOKS

POSITIONS OF LEGS


The Height of the Ramp can be adjusted by mounting Legs at a different position

The Ramp can be transported like a trailer when the legs are mounted upside down and the wheels are touching the ground


AIR PACKING INSTRUCTIONS

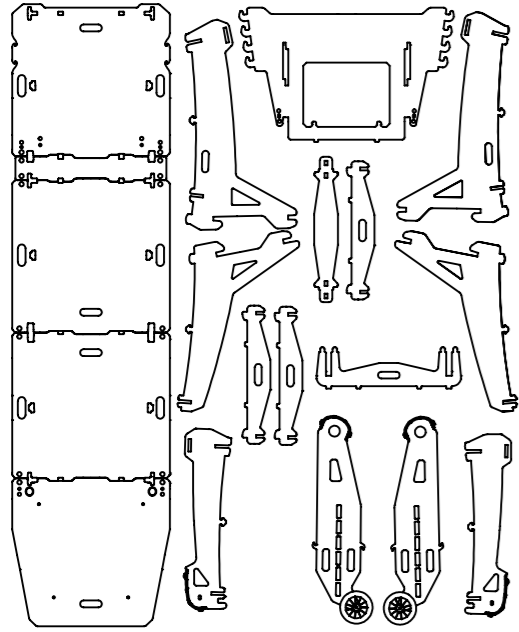


1.

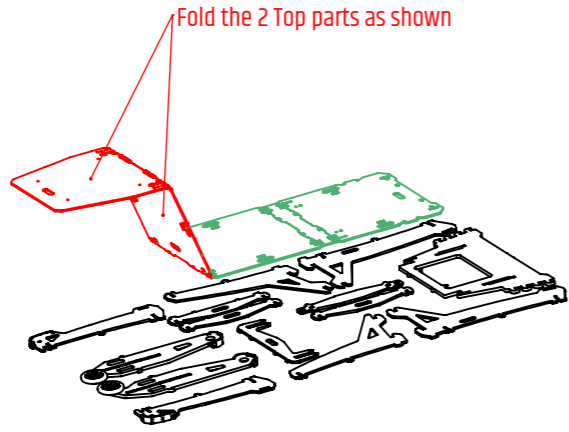


2.

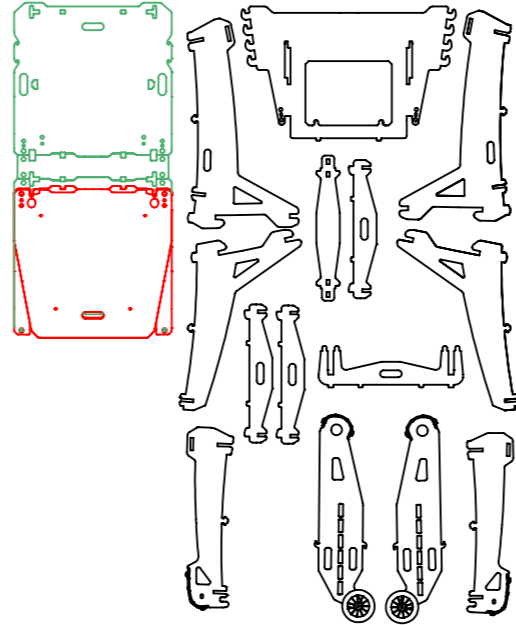


3.

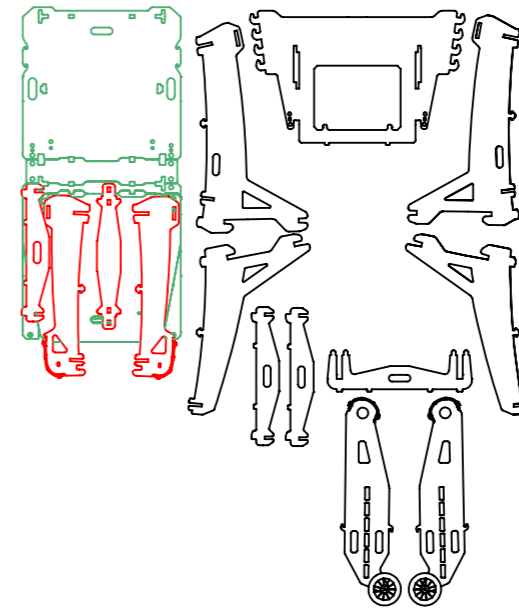


4.

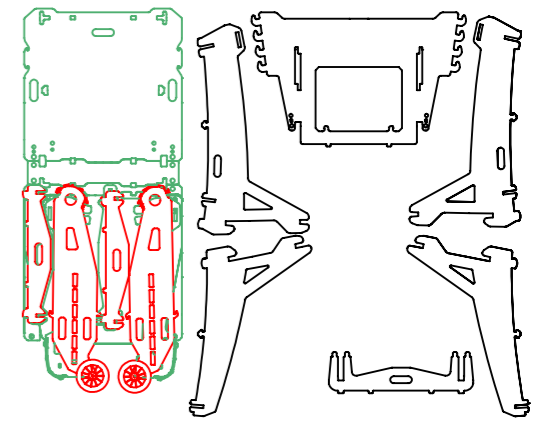


5.

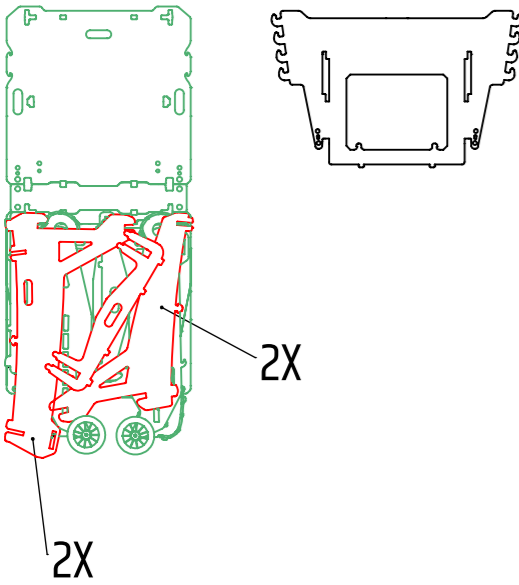


6.

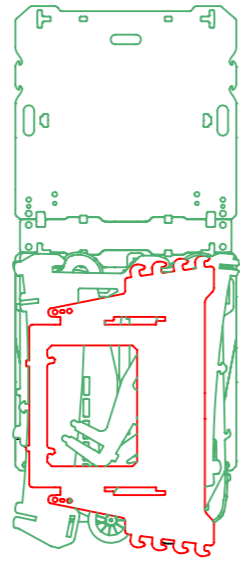


7.

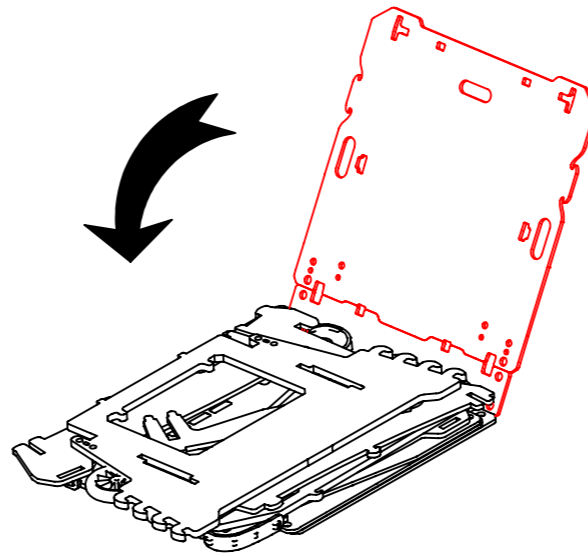

8.

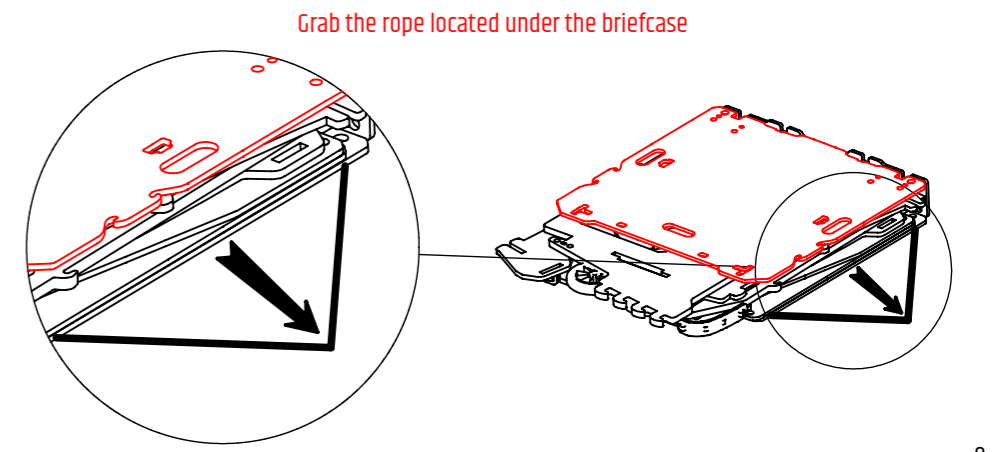

9.

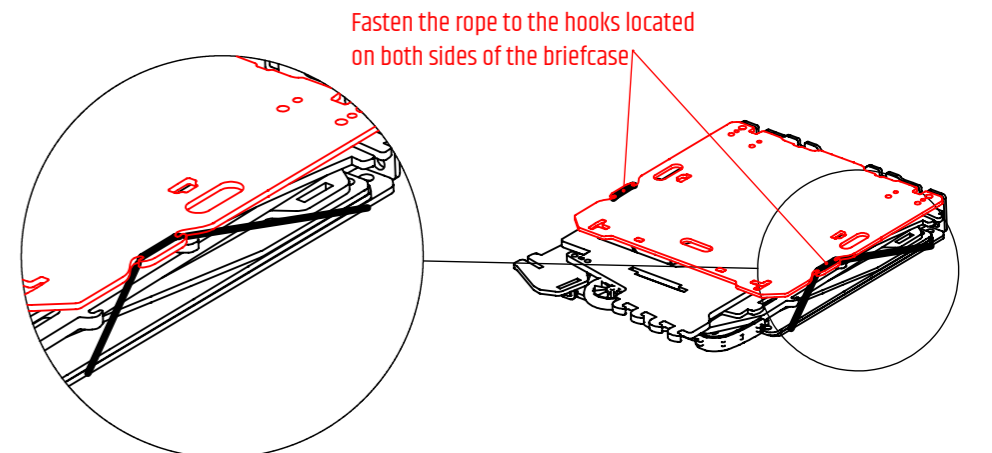

10.